



V-TAC
Meaningful Innovation.



LED Floodlights

V-TAC's LED floodlights are manufactured with industry-leading components to deliver exceptional performance, making them the perfect choice for efficient outdoor lighting. Each unit is designed and made of die-cast aluminium for extreme durability. With the IP65 rating, all the floodlights in this series are also water and dust proof.

This extensive range of floodlights is ready to impress in terms of efficiency brought on by the Samsung LEDs. The PIR series comes with an auto-cutoff function(Manual Override)

Key Features

- 10w to 1000w
- IP65 rating — high-quality components to ensure waterproof/airtight performance
- Modern and strong Die cast aluminium body with a minimalistic design, for high-end support and design
- Product category include high lumen, slimline, PIR series, rechargeable, work floodlight, and sports floodlights
- Select units include a 1 meter wire for easy and convenient installation





LED FLOODLIGHTS



NEW



HIGH LUMEN SLIMLINE SERIES

- IP65 Rating.
 - SMD-Samsung Chip
 - 5 Years Warranty
 - AC:220-240V,50Hz
 - Body Type: Aluminium
- 115° Beam Angle
 - CRI >70
 - PF >0.9
 - 25,000 hr lifespan
 - 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
8844 4000K DAY WHITE 8845 6500K WHITE	VT-4455	50W	5740	10 pcs		183.5x34x169mm
8846 4000K DAY WHITE 8847 6500K WHITE	VT-44101	100W	11480	4 pcs		253.5x40x242.5mm
8848 4000K DAY WHITE 8849 6500K WHITE	VT-44201	200W	22960	2 pcs		402.5x44x349.5mm

NEW



IP65
RATING

05
YEAR
WARRANTY

135
LUMEN/W

1
METER
WIRE

HIGH LUMEN SLIMLINE SERIES-
1M WIRE

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- 115° Beam Angle
- CRI >70
- PF >0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Diagram	Size
23196 3000K WARM WHITE 23197 4000K DAY WHITE 23198 6500K WHITE	VT-44033-1	30W	3450		164.5x34x153mm
23199 3000K WARM WHITE 23216 4000K DAY WHITE 23217 6500K WHITE	VT-4455-1	50W	5740		183.5x34x169mm
23200 3000K WARM WHITE 23218 4000K DAY WHITE 23219 6500K WHITE	VT-44101-1	100W	11480		242.5x40x253.5mm
23201 4000K DAY WHITE 23202 6500K WHITE	VT-44153-1	150W	17220		328.5x43x295mm
23220 4000K DAY WHITE 23221 6500K WHITE	VT-44201-1	200W	22960		402.5x44x349.5mm
10367 4000K DAY WHITE 23203 6500K WHITE	VT-44003-1	300W	34440		496x49x445mm



LED FLOODLIGHTS



NEW



LED FLOODLIGHTS BLACK BODY GREY GLASS

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- 115° Beam Angle
- CRI >70
- PF >0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
9898 3000K WARM WHITE 9899 4000K DAY WHITE 10010 6500K WHITE	VT-44010-B	10W	735	40 pcs		104x21x92mm
10014 3000K WARM WHITE 10015 4000K DAY WHITE 10016 6500K WHITE	VT-44020-B	20W	1620	20 pcs		126.5x28x114mm
10020 3000K WARM WHITE 10021 4000K DAY WHITE 10022 6500K WHITE	VT-44030-B	30W	2505	20 pcs		164x29x139mm
10026 6500K WHITE	VT-44050-B	50W	4270	20 pcs		183x29x169mm
10348 6500K WHITE	VT-44100	100W	8700	8 pcs		254x33x217mm

NEW



IP65
RATING

05
YEAR
WARRANTY

LED FLOODLIGHTS WHITE
BODY WHITE GLASS

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- 115° Beam Angle
- CRI >70
- PF >0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
10011 3000K WARM WHITE 10012 4000K DAY WHITE 10013 6500K WHITE	VT-44010-W	10W	735	40 pcs		104x21x92mm
10017 3000K WARM WHITE 10018 4000K DAY WHITE 10019 6500K WHITE	VT-44020-W	20W	1620	20 pcs		126.5x28x114mm
10023 3000K WARM WHITE 10024 4000K DAY WHITE 10025 6500K WHITE	VT-44030-W	30W	2505	20 pcs		164x29x139mm



LED FLOODLIGHTS

NEW



HIGH
POWER LED
FLOODLIGHTS



- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- 115° Beam Angle
- CRI >70
- PF >0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
10027 4000K DAY WHITE 10028 6500K WHITE	VT-44200-B	200W	17540	4 pcs		405x36x326mm
10031 4000K DAY WHITE 10032 6500K WHITE	VT-44300-B	300W	26390	2 pcs		496x49x445mm

NEW



HIGH
POWER LED
FLOODLIGHTS



- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- 115° Beam Angle
- CRI >70
- PF >0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
10029 4000K DAY WHITE 10030 6500K WHITE	VT-44200-W	200W	17540	4 pcs		405x36x326mm
10033 4000K DAY WHITE 10034 6500K WHITE	VT-44300-W	300W	26390	2 pcs		496x49x445mm



HIGH LUMEN EVOLUTION SERIES

- IP65 Rating.
- SMD
- 5 Years Warranty
- AC:220-240V,50Hz
- Die cast Aluminium body
- 100° Beam Angle
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20450 6500K WHITE	VT-30185	30W	4720	10 pcs		165x204.5x46mm
20452 6500K WHITE	VT-50185	50W	7870	10 pcs		197.5x241.5x46mm
20455 4000K DAY WHITE 20456 6500K WHITE	VT-150185	150W	23600	2 pcs		318.5x390x55mm



NEW



IP65
RATING

02
YEAR
WARRANTY

EFFICIENCY
185
LUMENS/W

HIGH LUMEN EVOLUTION SERIES

- IP65 Rating.
- SMD
- 2 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
9255 4000K DAY WHITE 9891 6500K WHITE	VT-4435	30W	5550	10 pcs		164.5x34x153mm
9892 4000K DAY WHITE 9893 6500K WHITE	VT-4456	50W	9250	10 pcs		183.5x34x169mm
9894 4000K DAY WHITE 9895 6500K WHITE	VT-44105	100W	18500	4 pcs		253.5x40x242.5mm
9896 4000K DAY WHITE 9897 6500K WHITE	VT-44205	200W	37000	2 pcs		402.5x44x349.5mm



IP65
RATING

05
YEAR
WARRANTY

EFFICIENCY
160
LUMENS/W

HIGH LUMEN SLIMLINE PRO
SERIES

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Die cast Aluminium body
- 100° Beam Angle
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20402 4000K DAY WHITE 20403 6500K WHITE	VT-32	30W	4100	10 pcs		165x204.5x46mm
20405 6500K WHITE	VT-52	50W	6850	10 pcs		197.5x241.5x46mm
20409 6500K WHITE	VT-162	150W	20500	2 pcs		318.5x390x55mm



HIGH LUMEN EVOLUTION
SERIES

- Aluminium body
- 100° beam angle
- 30,000 hr lifespan
- CRI: >70
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
5998 3000K WARM WHITE	VT-4961	50W	8000	10 pcs		241.5x197.5x46mm
5997 3000K WARM WHITE	VT-49161	100W	16000	4 pcs		299x247.5x49.5mm

NEW



IP65
RATING

02
YEAR
WARRANTY

EFFICIENCY
160
LUMENS/W

HIGH LUMEN EVOLUTION
SERIES

- IP65 Rating.
- SMD
- 2 Years Warranty
- AC:220-240V,50Hz
- Body Type: Aluminium
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- 0-100% in <1sec

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
10353 4000K DAY WHITE	VT-44031	30W	4800	10 pcs		164.5x34x153mm
10354 4000K DAY WHITE	VT-44051	50W	8000	10 pcs		183.5x34x169mm
10355 4000K DAY WHITE	VT-44106	100W	16000			253.5x40x242.5mm
10362 4000K DAY WHITE	VT-44160	150W	24000	4 pcs		328.5x43x295mm
10363 4000K DAY WHITE 10365 6500K WHITE	VT-44206	200W	32000	2 pcs		402.5x44x349.5mm



LED FLOODLIGHT



- The floodlights work automatically, according to the level of surrounding light.
- The floodlight will automatically turn on at light levels below 140lux. At light levels above 140lux, the floodlight will turn off.
- There is no need to manually switch the light on or off.
- Floodlights with automatic light sensors do not react to motion.

LED FLOODLIGHTS WITH LIGHT SENSOR

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20169 3000K WARM WHITE 20170 4000K DAY WHITE 20171 6500K WHITE	VT-37	30W	3000	20 pcs		165x46x204.5mm
20172 3000K WARM WHITE 20173 4000K DAY WHITE 20174 6500K WHITE	VT-57	50W	5000	10 pcs		197.5x46x241.5mm
20175 3000K WARM WHITE 20176 4000K DAY WHITE 20177 6500K WHITE	VT-117	100W	10000	4 pcs		247.5x49.5x299mm
20178 3000K WARM WHITE 20179 4000K DAY WHITE 20180 6500K WHITE	VT-167	150W	15000	2 pcs		318.5x55x390mm
20181 3000K WARM WHITE 20182 4000K DAY WHITE 20183 6500K WHITE	VT-272	200W	20000	2 pcs		371x57x458.5mm

NEW



LED FLOODLIGHTS WITH LIGHT SENSOR

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Diagram	Size
23186 4000K DAY WHITE 23187 6500K WHITE	VT-44032PS	30W	3100		165x46x204.5mm
23188 4000K DAY WHITE 23189 6500K WHITE	VT-44052PS	50W	5200		197.5x46x241.5mm
23190 4000K DAY WHITE 23191 6500K WHITE	VT-44103PS	100W	11480		247.5x49.5x299mm
23192 4000K DAY WHITE 23193 6500K WHITE	VT-44153PS	150W	17220		318.5x55x390mm
23194 4000K DAY WHITE 23195 6500K WHITE	VT-44203PS	200W	22960		371x57x458.5mm



LED FLOODLIGHT



- Instant start in 1 second
- Operation in outside temperatures (-20 to+40° C)
- Protection rating IP65
- Only connect with waterproof cable.

LED FLOODLIGHTS - DIRECT CONNECTION

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20304 3000K WARM WHITE 20305 4000K DAY WHITE 20306 6500K WHITE	VT-118	10W	735	20 pcs		133x55x88mm
20307 3000K WARM WHITE 20308 4000K DAY WHITE 20309 6500K WHITE	VT-128	20W	1510	20 pcs		157x56x101mm
20310 3000K WARM WHITE 20311 4000K DAY WHITE 20312 6500K WHITE	VT-138	30W	2340	10 pcs		177x56x117mm
20313 3000K WARM WHITE 20314 4000K DAY WHITE 20315 6500K WHITE	VT-158	50W	4000	10 pcs		195x57x152mm



- Instant start in 1second
- Operation in outside temperaturess (-20 to +40° C)
- Manual override function
- When the lock sensor function, avoid long time lighting in extreme weather.

LED FLOODLIGHTS - DIRECT CONNECTION WITH PIR SENSOR

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20256 3000K WARM WHITE 20257 4000K DAY WHITE 20258 6500K WHITE	VT-118S-B	10W	735	20 pcs		133x60x113mm
20259 3000K WARM WHITE 20260 4000K DAY WHITE 20261 6500K WHITE	VT-128S-B	20W	1510	20 pcs		157x60x128mm
20262 3000K WARM WHITE 20263 4000K DAY WHITE 20264 6500K WHITE	VT-138S-B	30W	2340	10 pcs		177x60x143mm
20265 3000K WARM WHITE 20266 4000K DAY WHITE 20267 6500K WHITE	VT-158S-B	50W	4000	10 pcs		195x60x178mm



LED FLOODLIGHTS



Built-in junction box for direct connection

- Instant start in 1second
- Operation in outside temperaturess (-20 to +40° C)
- Manual override function
- When the lock sensor function, avoid long time lighting in extreme weather.

LED FLOODLIGHTS - DIRECT CONNECTION WITH PIR SENSOR

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20268 3000K WARM WHITE 20269 4000K DAY WHITE 20270 6500K WHITE	VT-118S-W	10W	735	20 pcs		133x60x113mm
20271 3000K WARM WHITE 20272 4000K DAY WHITE 20273 6500K WHITE	VT-128S-W	20W	1510	20 pcs		157x60x128mm
20274 3000K WARM WHITE 20275 4000K DAY WHITE 20276 6500K WHITE	VT-138S-W	30W	2340	10 pcs		177x60x143mm
20277 3000K WARM WHITE 20278 4000K DAY WHITE 20279 6500K WHITE	VT-158S-W	50W	4000	10 pcs		195x60x178mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.



- Instant start in 1second
- Operation in outside temperaturess (-20 to +40° C)
- Manual override function
- When the lock sensor function, avoid long time lighting in extreme weather.
- Extra-long 1 meter cable included for easy installation.

LED FLOODLIGHTS WITH PIR SENSOR

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20280 3000K WARM WHITE 20281 4000K DAY WHITE 20282 6500K WHITE	VT-118S-1-B	10W	735	20 pcs		133x60x113mm
20283 3000K WARM WHITE 20284 4000K DAY WHITE 20285 6500K WHITE	VT-128S-1-B	20W	1510	20 pcs		157x60x128mm
20286 3000K WARM WHITE 20287 4000K DAY WHITE 20288 6500K WHITE	VT-138S-1-B	30W	2340	10 pcs		177x60x143mm
20289 3000K WARM WHITE 20290 4000K DAY WHITE 20291 6500K WHITE	VT-158S-1-B	50W	4000	10 pcs		195x60x178mm



LED FLOODLIGHTS



- Instant start in 1second
- Operation in outside temperaturess (-20 to +40° C)
- Manual override function
- When the lock sensor function, avoid long time lighting in extreme weather.
- Extra-long 1 meter cable included for easy installation.

LED FLOODLIGHTS WITH PIR SENSOR

- Die cast Aluminium body
- 100° beam angle
- 25,000 hrs lifespan
- >15000 On/Off Cycles
- CRI: >80
- PF: >0.9
- AC:220-240V,50Hz
- IP65 Rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20292 3000K WARM WHITE 20293 4000K DAY WHITE 20294 6500K WHITE	VT-118S-1-W	10W	735	20 pcs		133x60x113mm
20295 3000K WARM WHITE 20296 4000K DAY WHITE 20297 6500K WHITE	VT-128S-1-W	20W	1510	20 pcs		157x60x128mm
20298 3000K WARM WHITE 20299 4000K DAY WHITE 20300 6500K WHITE	VT-138S-1-W	30W	2340	10 pcs		177x60x143mm
20301 3000K WARM WHITE 20302 4000K DAY WHITE 20303 6500K WHITE	VT-158S-1-W	50W	4000	10 pcs		195x60x178mm



IP65
RATING

05
YEAR
WARRANTY

PIR
MOTION
SENSOR

Incorporating security features, V-TAC offers a new range of LED floodlights equipped with PIR sensors and Samsung LEDs for even better high-end performance. Can be used as a regular floodlight through the Auto Cut-off function(manual override). Widely used for security lighting in residential, commercial, and industrial areas.

LED FLOODLIGHTS WITH
PIR SENSOR

- 30,000 hr lifespan
 - 100° Beam Angle
 - AC:220-240V,50Hz
 - CRI: >80
 - PF>0.7 for 10,20w; 0.9 for 30,50w
 - On/Off cycle: >15000
- Instant start in <1sec
 - Die-cast Aluminium Body
 - Detection Angle:120°
 - Detection distance:2-8m
 - Time delay: MIN12+-3sec MAX6+-2min
 - Installation height: 1.8-2.5m

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
433 3000K WARM WHITE 434 4000K DAY WHITE 435 6400K WHITE	VT-10-S-W	10W	800	1 meter	20 pcs		114.5x54.86x153.78mm
448 3000K WARM WHITE 449 4000K DAY WHITE 450 6400K WHITE	VT-20-S-W	20W	1600	1 meter	20 pcs		153x55.46x177.75mm
457 3000K WARM WHITE 458 4000K DAY WHITE 459 6400K WHITE	VT-30-S-W	30W	2400	1 meter	20 pcs		178x57.16x197.75mm
466 3000K WARM WHITE 467 4000K DAY WHITE 468 6400K WHITE	VT-50-S-W	50W	4000	1 meter	10 pcs		223x57.06x234.3mm



LED FLOODLIGHTS



IP65
RATING

05
YEAR
WARRANTY

PIR
MOTION
SENSOR

Incorporating security features, V-TAC offers a new range of LED floodlights equipped with PIR sensors and Samsung LEDs for even better high-end performance. Can be used as a regular floodlight through the Auto Cut-off function(manual override). Widely used for security lighting in residential, commercial, and industrial areas.

LED FLOODLIGHTS WITH PIR SENSOR

- 30,000 hr lifespan
 - 100° Beam Angle
 - AC:220-240V,50Hz
 - CRI: >80
 - PF>0.7 for 10,20w; 0.9 for 30,50w
 - On/Off cycle: >15000
- Instant start in <1sec
 - Die-cast Aluminium Body
 - Detection Angle:120°
 - Detection distance:2-8m
 - Time delay: MIN12+-3sec MAX6+-2min
 - Installation height: 1.8-2.5m

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
436 3000K WARM WHITE 437 4000K DAY WHITE 438 6400K WHITE	VT-10-S-B	10W	800	1 meter	20 pcs		114.5x54.86x153.78mm
451 3000K WARM WHITE 452 4000K DAY WHITE 453 6400K WHITE	VT-20-S-B	20W	1600	1 meter	20 pcs		153x55.46x177.75mm
460 3000K WARM WHITE 461 4000K DAY WHITE 462 6400K WHITE	VT-30-S-B	30W	2400	1 meter	20 pcs		178x57.16x197.75mm
469 3000K WARM WHITE 470 4000K DAY WHITE 471 6400K WHITE	VT-50-S-B	50W	4000	1 meter	10 pcs		223x57.06x234.3mm



IP65
RATING

05
YEAR
WARRANTY

120
LUMEN/W

The V-TAC LED High Lumen Floodlights offers energy-efficient, high output illumination for a wide range of lighting applications. This series consumes around 80% less energy than traditional outdoor lighting thanks to pioneering optics research and the latest LED technology from Samsung.

HIGH LUMEN SLIMLINE WHITE BODY

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Die cast Aluminium body
- 100° Beam Angle
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
763 6400K WHITE	VT-56-W	50W	6000	30cm	8 pcs		223x188x28mm
21762 4000K DAY WHITE	VT-56-W-N	50W	5750	1 meter	8 pcs		223x188x28mm
768 4000K DAY WHITE	VT-106-W	100W	12000	1 meter	4 pcs		291x240x30mm



LED FLOODLIGHTS



SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
21768 4000K DAY WHITE	VT-106-W-N	100W	11500	1 meter	4 pcs		291x240x30mm
774 4000K DAY WHITE 775 6400K WHITE	VT-156-W	150W	18000	1 meter	2 pcs		404x322x52mm
787 4000K DAY WHITE 788 6400K WHITE	VT-206-W	200W	24000	1 meter	2 pcs		439x346x56mm
21787 4000K DAY WHITE	VT-206-W-N	200W	23000	1 meter	2 pcs		439x346x48mm
793 4000K DAY WHITE 794 6400K WHITE	VT-306-W	300W	36000	1 meter	2 pcs		529x415x55mm
21793 4000K DAY WHITE	VT-306-W-N	300W	34500	1 meter	2 pcs		529x415x55mm



IP65
RATING

05
YEAR
WARRANTY

120
LUMEN/W

The V-TAC LED High Lumen Floodlights offers energy-efficient, high output illumination for a wide range of lighting applications. This series consumes around 80% less energy than traditional outdoor lighting thanks to pioneering optics research and the latest LED technology from Samsung.

HIGH LUMEN SLIMLINE BLACK BODY

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- 100° Beam Angle
- CRI >70
- PF>0.9
- 25,000 hr lifespan

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
760 4000K DAY WHITE	VT-56-B	50W	6000	30cm	8 pcs		223x188x28mm
21761 6500K WHITE	VT-56-B-N	50W	5750	1 meter	8 pcs		223x188x28mm
767 6400K WHITE	VT-106-B	100W	12000	1 meter	4 pcs		291x240x30mm
21767 6500K WHITE	VT-106-B-N	100W	11500	1 meter	4 pcs		291x240x30mm
772 4000K DAY WHITE	VT-156-B	150W	18000	1 meter	2 pcs		404x322x52mm



LED FLOODLIGHTS



SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
21772 4000K DAY WHITE 21773 6500K WHITE	VT-156-B-N	150W	17300	1 meter	2 pcs		404x322x48mm
778 4000K DAY WHITE 779 6400K WHITE	VT-206-B	200W	24000	1 meter	2 pcs		439x346x56mm
21779 6500K WHITE	VT-206-B-N	200W	23000	1 meter	2 pcs		439x346x48mm
791 4000K DAY WHITE	VT-306-B	300W	36000	1 meter	2 pcs		529x415x55mm
21792 6500K WHITE	VT-306-B-N	300W	34500	1 meter	2 pcs		529x415x55mm
964 4000K DAY WHITE 965 6400K WHITE	VT-405	400W	48000	1 meter	1 pcs		580x505x155mm
966 4000K DAY WHITE 967 6400K WHITE	VT-505	500W	60000	1 meter	1 pcs		580x505x155mm
969 6400K WHITE	VT-1055	1000W	120000	1 meter	1 pcs		709x709x155mm
21969 6500K WHITE	VT-1055-N	1000W	120000	1 meter	1 pcs		709x709x155mm



IP65
RATING

05
YEAR
WARRANTY

120
LUMEN/W

The V-TAC LED High Lumen Floodlights offers energy-efficient, high output illumination for a wide range of lighting applications. This series consumes around 80% less energy than traditional outdoor lighting thanks to pioneering optics research and the latest LED technology from Samsung.

HIGH LUMEN SLIMLINE GREY BODY

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Die cast Aluminium body
- 100° Beam Angle
- CRI >70
- PF>0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
764 4000K DAY WHITE	VT-56-G	50W	6000	30cm	8 pcs		223x188x28mm
21764 4000K DAY WHITE 21765 6500K WHITE	VT-56-G-N	50W	5750	1 meter	8 pcs		223x188x28mm
771 6400K WHITE	VT-106-G	100W	12000	1 meter	4 pcs		291x240x30mm



LED FLOODLIGHTS



SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
21770 4000K DAY WHITE 21771 6500K WHITE	VT-106-G-N	100W	11500	1 meter	4 pcs		291x240x30mm
777 6400K WHITE	VT-156-G	150W	18000	1 meter	2 pcs		404x322x52mm
789 4000K DAY WHITE 790 6400K WHITE	VT-206-G	200W	24000	1 meter	2 pcs		439x346x56mm
21789 4000K DAY WHITE 21790 6500K WHITE	VT-206-G-N	200W	23000	1 meter	2 pcs		439x346x48mm
795 4000K DAY WHITE 796 6400K WHITE	VT-306-G	300W	36000	1 meter	2 pcs		529x415x55mm
21796 6500K WHITE	VT-306-G-N	300W	34500	1 meter	2 pcs		529x415x55mm



V-TAC's PRO Series LED floodlights are equipped with Samsung LEDs for a well-diffused, high-performance outdoor lighting encased in a IP65-rated die-cast aluminium body for durability. Available in 10-300W in a clean, ivory white finish. Select models come with a one (1) meter wire.

SLIMLINE WHITE BODY

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- 100° Beam Angle
- CRI >80
- PF>0.9
- 25,000 hr lifespan

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
427 3000K WARM WHITE	VT-10-W	10W	800	30cm	20 pcs		115x108x26mm
444 6400K WHITE	VT-20-W	20W	1600	30cm	20 pcs		153x132x27mm
21442 3000K WARM WHITE	VT-20-W-N	20W	1510	1 meter	20 pcs		153x132x27mm
403 3000K WARM WHITE	VT-30-W	30W	2400	30cm	10 pcs		178x152 x28mm
21404 4000K DAY WHITE	VT-30-W-N	30W	2340	1 meter	10 pcs		178x152x28mm



LED FLOODLIGHTS



SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
950 6400K WHITE	VT-30-1-W	30W	2400	30cm	10 pcs		178x152 x28mm
411 6400K WHITE	VT-50-W	50W	4000	30cm	8 pcs		223x188x28mm
21409 3000K WARM WHITE 21410 4000K DAY WHITE 21411 6500K WHITE	VT-50-W-N	50W	4000	30cm	8 pcs		223x188x28mm
952 6400K WHITE	VT-50-1-W	50W	4000	30cm	8 pcs		223x188x28mm
415 3000K WARM WHITE 416 4000K DAY WHITE 417 6400K WHITE	VT-100-W	100W	8000	1 meter	4 pcs		291x240x30mm
21415 3000K WARM WHITE 21416 4000K DAY WHITE 21417 6500K WHITE	VT-100-W-N	100W	8200	1 meter	4 pcs		291x240x30mm
478 3000K WARM WHITE 479 4000K DAY WHITE 480 6400K WHITE	VT-150-W	150W	12000	1 meter	2 pcs		404x322x52mm
421 6400K WHITE	VT-200-W	200W	16000	1 meter	2 pcs		439x346x56mm
21420 4000K DAY WHITE	VT-200-W-N	200W	16500	1 meter	2 pcs		439x346x48mm
486 4000K DAY WHITE 487 6400K WHITE	VT-300-W	300W	24000	1 meter	2 pcs		529x415x55mm



V-TAC’s PRO Series LED floodlights are equipped with Samsung LEDs for a well-diffused, high-performance outdoor lighting encased in a IP65-rated die-cast aluminium body for durability. Available in 10-300W in a classic, jet black finish. Select models come with a one (1) meter wire.

SLIMLINE BLACK BODY

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Die cast Aluminium body
- 100° Beam Angle
- CRI >80
- PF>0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
21406 3000K WARM WHITE 21407 4000K DAY WHITE	VT-50-B-N	50W	4000	1 meter	8 pcs		223x188x28mm
21947 6500K WHITE	VT-10-1-B-N	10W	735	1 meter	20 pcs		115x108x26mm
20012 4000K DAY WHITE 948 6400K WHITE	VT-20-1-B	20W	1600	1 meter	20 pcs		153x132x27mm



LED FLOODLIGHTS



SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
21948 6500K WHITE	VT-20-I-B-N	20W	1510	1 meter	20 pcs		153x132x27mm
20013 4000K DAY WHITE 949 6400K WHITE	VT-30-I-B	30W	2400	1 meter	10 pcs		178x152 x28mm
21949 6400K WHITE	VT-30-I-B-N	30W	2340	1 meter	10 pcs		178x152 x28mm
2120014 4000K DAY WHITE 21951 6500K WHITE	VT-50-I-B-N	50W	4000	1 meter	8 pcs		223x188x28mm
21412 3000K WARM WHITE 21413 4000K DAY WHITE 21414 6400K WHITE	VT-100-B-N	100W	8200	1 meter	4 pcs		291x240x30mm
21476 4000K DAY WHITE 21477 6500K WHITE	VT-150-B-N	150W	12000	1 meter	2 pcs		404x322x52mm
21419 6500K WHITE	VT-200-B-N	200W	16500	1 meter	2 pcs		439x346x48mm
21422 4000K DAY WHITE 21423 6500K WHITE	VT-300-B-N	300W	24800	1 meter	2 pcs		529x415x55mm



V-TAC's PRO Series LED floodlights are equipped with Samsung LEDs for a well-diffused, high-performance outdoor lighting encased in a die-cast IP65 body for durability. Available in 10W to 300 watts, in a modern, neutral grey finish. Select models come with a one (1) meter wire.

SLIMLINE GREY BODY

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V,50Hz
- Die cast Aluminium body
- 100° Beam Angle
- CRI >80
- PF>0.9
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
430 3000K WARM WHITE 431 4000K DAY WHITE	VT-10-G	10W	800	30cm	20 pcs		115x108x26mm
445 3000K WARM WHITE 446 4000K DAY WHITE	VT-20-G	20W	1600	30cm	20 pcs		153x132x27mm
454 3000K WARM WHITE 455 4000K DAY WHITE 456 6400K WHITE	VT-30-G	30W	2400	30cm	10 pcs		178x152 x28mm
21464 4000K DAY WHITE	VT-50-G-N	50W	4000	1 meter	8 pcs		223x188x28mm
21473 4000K DAY WHITE	VT-100-G-N	100W	8200	1 meter	4 pcs		291x240x30mm



LED FLOODLIGHTS



- SOS FLASH
- MICRO SOCKET
- USB PORT

A strong, reliable, and portable lamp -- V-TAC's new compact and rechargeable LED floodlights can easily be recharged through the micro socket & USB port, making them perfect for home projects, garages, warehouses, car repair shops, parking lots, camping and more.

RECHARGEABLE FLOODLIGHTS

- LED provided by Samsung
- Saves 80% energy
- Function: 100%-50%-SOS
- 3.7V Li-Ion 3600mAh battery
- Rechargeable
- Contains no lead or mercury
- 30,000 hr lifespan

SKU	Model	Watts	Lumens	Plug	Box Qty	Diagram	Size
20038 4000K DAY WHITE 503 6400K WHITE	VT-10-R	10W	700	micro usb cable without SOS Flash	20 pcs		175x125mm
20037 4000K DAY WHITE 502 6400K WHITE	VT-11-R	10W	700	micro usb cable	20 pcs		175x125mm
20039 4000K DAY WHITE 504 6400K WHITE	VT-20-R	20W	1400	micro usb cable	20 pcs		175x125mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.



WIDE
VOLTAGE
100V-265V

IP65
RATING

1.5
METER
WIRE

V-TAC's LED Work Light is designed for a wide voltage range: 100-265VAC and comes with a 1.5-meter wire. This floodlight is an ideal tool for construction sites, facade lighting, lobbies, garages, passages, parking lots and other locations.

GREY GLASS-YELLOW WORK
FLOODLIGHTS

- AC:100-265V,50/60Hz
- 100° beam angle
- 30,000 hr lifespan
- CRI >80
- PF >0.9
- IP65 Rating
- Material: Die-cast Aluminium
- On/Off cycle: >15000
- 1.5 meter wire with BS plug

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
20121 6400K WHITE	VT-58	50W	5000	1.5 meter	10 pcs		197.5x65x245mm
2120122 6400K WHITE	VT-108-N	100W	9400	1.5 meter	4 pcs		247.5x65x305mm



LED FLOODLIGHTS



A powerful, slim-built floodlight with a heavy-duty H-stand for high quality outdoor lighting performance. The floodlight can be tilted/ rotated and comes with a three-meter wire for maximum portability. Perfect for industrial areas – construction sites, repair shops and garages, warehouses, etc.

SLIM FLOODLIGHTS H-STAND

- Input AC:220-240V,50Hz
- CRI >80
- PF >0.9
- 25,000 hr lifespan
- 100° Beam Angle
- Material: Die-cast Aluminium
- On/Off cycle: >15000
- H-stand with 3 meter wire (EU Plug)

SKU	Model	Watts	Lumens	Wire	Box Qty	Diagram	Size
20125 6400K WHITE	VT-109	100W	8000	3 meter - EU Plug	10 pcs		352x184x380mm
2120124 4000K DAY WHITE 2120125 6400K WHITE	VT-109-N	100W	8200	3 meter - EU Plug	10 pcs		352x184x380mm



05
YEAR
WARRANTY

120
LUMEN/W



IK08
RATING

DIMMABLE

IP66
RATING



Our heavy-duty IP66 LED Floodlights are perfect for industrial lighting. Never worry about efficiency — these floodlights are equipped with critically acclaimed LEDs provided by Samsung and excellent MEAN WELL drivers to ensure optimal energy saving and temperature dissipation.


SUPER PRO SERIES-500W

- 120° Beam Angle (Rotatable)
- CRI: >70
- PF: > 0.9
- AC: 100-277V
- Material: Die-cast Aluminium
- 50,000 hr lifespan

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
496 4000K DAY WHITE	VT-503D	500W	60000	1 pcs		563.8x510x136.75mm



LED FLOODLIGHTS

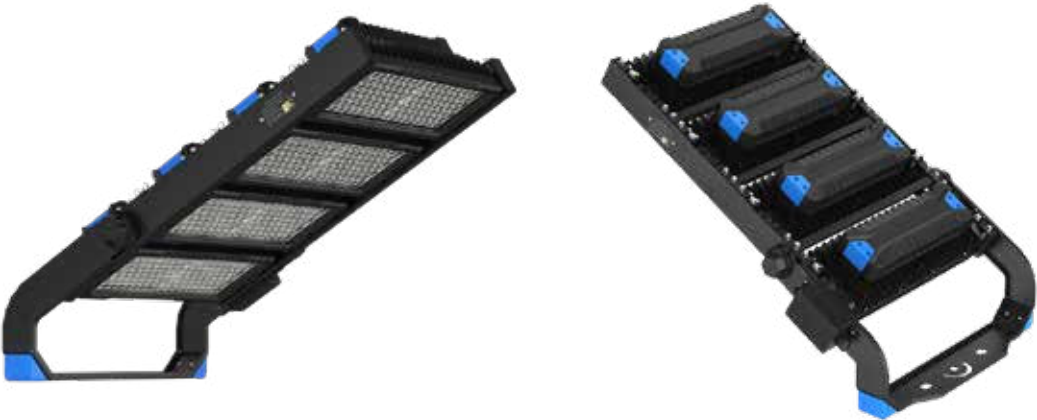

Our heavy-duty IP66 LED Floodlights are perfect for industrial lighting. Never worry about efficiency — these floodlights are equipped with critically acclaimed LEDs provided by Samsung and excellent MEAN WELL drivers to ensure optimal energy saving and temperature dissipation.

SUPER PRO SERIES-1000W

- 60° & 120° Beam Angle (Rotatable)
 - CRI: >70
 - PF: > 0.9
- AC: 100-277V
 - Material: Die-cast Aluminium
 - 50,000 hr lifespan

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
498 4000K DAY WHITE	VT-1003D	1000W	120000	1 pcs		965.8x510x136.25mm
499 4000K DAY WHITE	VT-1002D	1000W	120000	1 pcs		965.8x510x136.25mm



V-TAC
Meaningful Innovation.



LED Streetlights

Light the path to a brighter future — V-TAC's LED street lights are equipped with premium-quality LEDs from Samsung and high performance drivers from DALI, Inventronics, and MEAN WELL to provide uniform brightness and illumination for highways, streets, tunnels, plazas, industrial facilities, car parks, etc. Includes Class I & Class II Type III-M lenses.

Key Features

- Modern and efficient replacement for traditional streetlights
- Saves 80% on electricity cost
- Low maintenance; long lifespan
- Weatherproof body rated IP65/66
- Optimally designed glass lenses to prevent eye strain
- Uniform light distribution maximizes efficiency
- Fully operational, even in extreme weather conditions
- DALI, Inventronics, MEAN WELL drivers
- Select models equipped with an automatic light sensor





LED STREETLIGHTS

V-TAC
Meaningful Innovation.



05

YEAR

WARRANTY

IP65

RATING

ADJUSTABLE

ANGLE

AUTOMATIC

SENSOR

OFF

ON

≤15LUX

IN-HOUSE

TOOLING

LED STREETLIGHTS WITH LIGHT SENSOR

- IP65 Rating

• SMD-Samsung Chip

• 5 Years Warranty

• AC:220-240V, 50Hz

• Body Type: Aluminium
- 100° Beam Angle

• CRI >70

• PF>0.9

• 30,000 hr lifespan

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20430 4000K DAY WHITE	VT-39ST-S	30W	3000	pcs		416x138x99mm
20432 4000K DAY WHITE 20433 6500K WHITE	VT-59ST-S	50W	5000	pcs		470x149x99mm
20435 6500K WHITE	VT-139ST-S	100W	11000	pcs		567x179x99mm
20436 4000K DAY WHITE 20437 6500K WHITE	VT-169ST-S	150W	16500	pcs		628x203x99mm



05
YEAR
WARRANTY

IP65
RATING

IN-HOUSE
TOOLING

ADJUSTABLE
ANGLE

LED STREETLIGHTS ADJUSTABLE

- IP65 Rating.
 - SMD-Samsung Chip
 - 5 Years Warranty
 - AC:220-240V, 50Hz
 - Body Type: Aluminium
- 100° Beam Angle
 - CRI >70
 - PF>0.9
 - 30,000 hr lifespan

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20422 4000K DAY WHITE 20423 6500K WHITE	VT-39ST	30W	3000	pcs		416x138x99mm
20424 4000K DAY WHITE 20425 6500K WHITE	VT-59ST	50W	5000	pcs		470x149x99mm
2120424 4000K DAY WHITE 2120425 6500K WHITE	VT-59ST-N	50W	5740	pcs		470x149x99mm



LED STREETLIGHTS



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20438 4000K DAY WHITE	VT-79ST	70W	7500	pcs		470x149x99mm
2120438 4000K DAY WHITE 2120439 6500K WHITE	VT-79ST-n	70W	8040	pcs		470x149x99mm
20426 4000K DAY WHITE 20427 6500K WHITE	VT-139ST	100W	11000	pcs		567x179x99mm
2120426 4000K DAY WHITE 2120427 6500K WHITE	VT-139ST-N	100W	11480	pcs		567x179x99mm
20429 6500K WHITE	VT-169ST	150W	16500	pcs		628x203x99mm
2120428 4000K DAY WHITE 2120429 6500K WHITE	VT-169ST-N	150W	17220	pcs		628x203x99mm



- 05
YEAR
WARRANTY
- IP65
RATING
- IK08
RATING
- 10 KV
SURGE
PROTECTION
- inventronics
DRIVER
- 130
LUMEN/W

The LED suspended Light offers high lumen lighting for outdoor applications. Equipped with high-quality LEDs from Samsung and drivers from Inventronics, these efficient, energy-saving garden lights are great alternatives to traditional lighting options.

CLASS I, TYPE III-M LENS GARDEN LIGHTS SUSPENDED

- AC:176-265V,50HZ
 - Die-cast Aluminium/ADC12
 - 30,000 hr lifespan
 - Beam Angle:160x100°
- Instant start: 0-100% in <1sec
 - On/off cycle: >20,000 times
 - CRI: >70
 - PF: > 0.9
 - IK08 rating

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
545 4000K DAY WHITE	VT-115ST	100W	13000	1 pcs		520x348.8mm



LED STREETLIGHTS



- 05 YEAR WARRANTY
- IP65 RATING
- IK08 RATING
- 10 KV SURGE PROTECTION
- inventronics DRIVER
- 130 LUMEN/W

The new Class II Type III-M lens from V-TAC offers a wide beam angle of 150x80° — Primarily designed for lighting highways, general parking areas, and other spaces where a widely-lit area is required. Available from 80W to 200W, select models available with DALI drivers.

LED STREETLIGHTS (TYPE III-M LENS)

- AC:175-265V,50HZ
 - 30,000 hr lifespan
 - 150 x 80° Beam Angle
- CRI: >70
 - PF: > 0.9
 - Die-cast Aluminium

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
542 4000K DAY WHITE	VT-120ST	120W	15600	1 pcs		286x144x705mm
543 4000K DAY WHITE	VT-160ST	160W	20800	1 pcs		399x144x831mm
544 4000K DAY WHITE	VT-200ST	200W	26000	1 pcs		399x144x831mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.



05
YEAR
WARRANTY

IP65
RATING

IK08
RATING

140
LUMEN/W

inventronics
DRIVER

With options ranging from 100W up to 200W, V-TAC’s innovative selection of streetlights introduces the new dimmable series with Samsung LEDs and world-renowned Inventronics drivers. These Streetlights can be easily tailored for many night lighting needs of different areas and regions.

LED STREETLIGHTS
(INVENTRONICS-DIMMABLE)

- AC:200-240V
 - Die-cast Aluminium
 - 30,000 hr lifespan
- CRI: >70
 - PF: > 0.9
 - 153x70° Beam Angle

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
884 5700K WHITE	VT-102ST	100W	14000	1 pcs		658x270x85mm
885 4000K DAY WHITE 886 5700K WHITE	VT-122ST	120W	16800	1 pcs		658x270x85mm
887 4000K DAY WHITE 888 5700K WHITE	VT-152ST	150W	21000	1 pcs		748x300x85mm
889 4000K DAY WHITE 890 5700K WHITE	VT-202ST	200W	28000	1 pcs		748x300x85mm



LED STREETLIGHTS



05
YEAR
WARRANTY

IP65
RATING

IK08
RATING

10 KV
SURGE
PROTECTION

140
LUMEN/W

The Class I Type LED streetlight offers a high lumen output and superbly efficient performance , further improved with the industry-leading Inventronics driver. Primarily designed for lighting highways, general parking areas, and other spaces where a wide area lighting is required. Ranges 50W to 150W.

LED STREETLIGHTS
(INVENTRONICS-DIMMABLE)

- AC: 90-305V,50Hz
 - 30,000 hr lifespan
 - 153x70° Beam Angle
- CRI: >70
 - PF: > 0.9
 - Die-cast Aluminium

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
954 5700K WHITE	VT-103ST	100W	14000	2 pcs		270x83.6x656.4mm
955 5700K WHITE	VT-153ST	150W	21000	1 pcs		300x83.6x746.4mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.



05
YEAR
WARRANTY

IP65
RATING

IK08
RATING

120
LUMEN/W

The Slim Streetlight series from V-TAC offers a sleeker, leaner design without compromising the high lumen output that V-TAC streetlights are known for. Primarily designed for road lighting on highways, general parking areas, and other spaces where a wide-area lighting is required. Available in 30W to 150W.

LED SLIM STREETLIGHTS

- Input AC:120-240V,50/60Hz
 - CRI >70
 - PF >0.10
- 30,000 hr lifespan
 - 110° Beam Angle
 - Material: Aluminium

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21956 4000K DAY WHITE 21957 6500K WHITE	VT-34ST-N	30W	4050	4 pcs		374.8x134.9x62.9mm
959 6400K WHITE	VT-54ST	50W	6000	4 pcs		434.8x169.9x63mm
21958 4000K DAY WHITE 21959 6500K WHITE	VT-54ST-N	50W	6850	4 pcs		434.8x169.9x63mm
960 4000K DAY WHITE	VT-104ST	100W	12000	2 pcs		535x260x64mm
21960 4000K DAY WHITE 21961 6500K WHITE	VT-104ST-N	100W	13500	2 pcs		535x260x64mm
21962 4000K DAY WHITE 21963 6500K WHITE	VT-154ST-N	150W	20300	2 pcs		535x260x64mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



LED STREETLIGHTS



05
YEAR
WARRANTY

IP65
RATING

IK07
RATING

Retaining the classic design of the V-TAC streetlight, the grey streetlight series boasts high-quality LEDs from Samsung with superb energy efficiency. Available in 30W to 150W, and impressive lumen output of up to 18000.

LED STREETLIGHTS - GREY BODY

- IP65 Rating.
 - SMD-Samsung Chip
 - 5 Years Warranty
 - AC:220-240V, 50Hz
 - Die cast Aluminium body
- 110° Beam Angle
 - CRI >80
 - PF>0.9
 - 25,000 hr lifespan
 - On/Off Cycle >15000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
215251 4000K DAY WHITE 215261 6500K WHITE	VT-30ST-N-N	30W	3000	4 pcs		417.6x198.6x60mm
21528 6500K WHITE	VT-50ST-N	50W	4700	4 pcs		467.6x214.6x60mm
215271 4000K DAY WHITE	VT-50ST-N-N	50W	5000	4 pcs		467.6x214.6x60mm
21529 4000K DAY WHITE	VT-100ST-N	100W	9400	2 pcs		547.6x294.6x62.1mm
215291 4000K DAY WHITE 215301 6500K WHITE	VT-100ST-N-N	100W	10000	2 pcs		547.6x294.6x62.1mm
21531 4000K DAY WHITE	VT-150ST-N	150W	14100	2 pcs		594.1x299.6x67.5mm
215311 4000K DAY WHITE 215321 6500K WHITE	VT-150ST-N-N	150W	15000	2 pcs		594.1x299.6x67.5mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.

03
YEAR
WARRANTY

IP65
RATING




Retaining the classic design of the V-TAC streetlight, the iron grey streetlight series boasts high-quality LEDs from Samsung with superb energy efficiency. Available in 30W to 120W, and impressive lumen output of up to 12000

LED STREETLIGHTS-GREY

- AC:200-240V
- Die-cast Aluminium
- Beam Angle: 110°
- CRI: >70
- PF: > 0.9
- 30,000 hr lifespan




SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21537 4000K DAY WHITE 21538 6400K WHITE	VT-31ST-N	30W	2350	4 pcs		302x130x66mm




LED STREETLIGHTS



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21539 4000K DAY WHITE 21540 6400K WHITE	VT-51ST-N	50W	4200	4 pcs		396x170x88mm



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21535 4000K DAY WHITE 21536 6400K WHITE	VT-101ST-N	100W	8400	2 pcs		460x220x88mm



SKU	Model	Size	Description
3624	VT-795	Ø60x325mm	Compatible with 100W,120W and 150W models, this adapter allows adjusting of the streetlight's mounting angle to perfectly suit your client's requirements.
SKU	Model	Size	Description
3668	VT-795-1	40x60mm	Compatible with 30W and 50W models, this adapter allows adjusting of the streetlight's mounting angle to perfectly suit your client's requirements.



V-TAC
Meaningful Innovation.



LED Highbay Lights

Our world-class Highbay series includes models powered with drivers from market leaders MEAN WELL and Samsung - allowing us to provide extraordinary energy saving features.

Boasting staggering efficiency ratings of up to 180++ lumen/watt, and reliable drivers providing lifespans up to 50,000h, V-TAC's new generation of LED Highbays are the strongest and most efficient LED Highbays available in the market today. Available in 100W to 500W.

Key Features

- Professional upgraded drivers from MEAN WELL and Samsung
- Strong and durable die-cast aluminium body
- IP65 rating
- SMD LED
- Compatible with daylight sensors
- Up to 30,000 hr lifespan
- Available reflectors for a customized beam angle: aluminium & transparent pc





LED HIGHBAY LIGHTS



NEW



05 YEAR WARRANTY

IP65 RATING

140 LUMEN/W

1-10V DIMMABLE

LIFUD Driver

LED HIGHBAY WITH LIFUD DRIVER

- 140 lm/w
- 25,000 hr lifespan
- AC:175-265V,50/60Hz
- Black Body
- 5 Years Warranty
- Sphere 360° Beam Angle
- PF: >0.9
- CRI:>70
- Aluminium
- IP65
- SMD-Samsung Chip
- LIFUD Driver

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20480 4000K DAY WHITE 20481 6500K WHITE	VT-9-111	100W	14000	1 pcs		233x156mm
20482 4000K DAY WHITE 20483 6500K WHITE	VT-9-161	150W	21000	1 pcs		278x156mm
20484 4000K DAY WHITE 20485 6500K WHITE	VT-9-211	200W	28000	1 pcs		305x156mm




05
YEAR
WARRANTY

IP65
RATING

IK08
RATING

1-10V
DIMMABLE

SAMSUNG
POWER
SUPPLY



With our latest in-branding program with Samsung, these Highbays offer a high lumen output of up to 180 lm/w and boasts efficiency in every lumen with Samsung’s cutting edge drivers. With strong, IP65-rated die-cast Aluminium enclosing and unparalleled lighting performance, these LED Highbays are sure to take the industrial lighting market by storm.

LED Highbay Lights


- 120 -180 lm/w
 - 30,000 & 50,000 hr lifespan
 - AC:220-240V,50Hz
- PF: >0.9
 - CRI:>80
 - Die cast Aluminium

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Size
583 4000K DAY WHITE	VT-9-105	100W	120 LUMEN/W 12000	90°	1 pcs	ø260x150mm
576 6400K WHITE	VT-9-108	100W	EFFICIENCY 180 LUMENS/W 18000	120°	1 pcs	ø260x150mm

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



LED HIGHBAY LIGHTS



Powerful performance with ultra-efficient energy management. With an astonishing efficiency rating of 180 lm/w matched with the highly acclaimed MEAN WELL driver and IP65 Aluminium body.

LED HIGHBAY
(MEANWELL DRIVER)

- 180 lm/w
 - 30,000 & 50,000 hr lifespan
 - AC:220-240V,50Hz
 - 120° Beam Angle
- PF: >0.9
 - CRI:>80
 - Die cast Aluminium

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Size
567 6400K WHITE	VT-9-102	100W	18000	120°	2 pcs	ø260x145mm
569 6400K WHITE	VT-9-120	120W	21600	120°	2 pcs	ø260x145mm



SKU	Description
571	Aluminium Reflector-120°



SKU	Description
574	PC Transparent Reflector-120°




SKU	Description
586	PC Dustproof Cover



LED Highbays

- 100° Beam Angle
- 50,000 hr lifespan
- On/Off cycle: >25000
- Instant start: 0-100% in <1s
- AC:220-240V,50Hz
- Die cast Aluminium
- PF: >0.9
- CRI:>80




SKU	Model	Watts	Lumens	Box Qty	Size
563 6400K WHITE	VT-9-101	100W	12000	4 pcs	280x165mm



LED Highbays

- 120° Beam Angle
- 50,000 hr lifespan
- On/Off cycle: >25000
- Instant start: 0-100% in <1s
- AC:120-240V, 50/60Hz
- Die cast Aluminium
- PF: >0.9
- CRI:>80




SKU	Model	Watts	Lumens	Box Qty	Size
20063 4000K DAY WHITE 20064 5000K WHITE	VT-9-114	100W	12000	1 pcs	260x140.5mm

NEW



LED Highbays

- 90° Beam Angle
- 25,000 hr lifespan
- On/Off Cycle >15000
- SMD-Samsung Chip
- AC:175-265V, 50/60Hz
- Aluminium Body Type:
- PF: >0.9
- CRI:>80



SKU	Model	Watts	Lumens	Box Qty	Size
20477 6500K WHITE	VT-9-153	150W	16000	1 pcs	260x195mm




LED HIGHBAY LIGHTS



LED HIGHBAYS

- 120° Beam Angle
- 50,000 hr lifespan
- On/Off cycle: >25000
- Instant start: 0-100% in <1s
- AC:100-277V, 50/60Hz
- Die cast Aluminium
- PF: >0.9
- CRI:>80



SKU	Model	Watts	Lumens	Box Qty	Size
509 4000K DAY WHITE	VT-9-500	500W	60000	1 pcs	ø360x306mm



LED HIGHBAYS

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:175-265V, 50Hz
- Die cast Aluminium body
- 90° Beam Angle
- CRI >70
- PF>0.9
- 30,000 hr lifespan
- On/Off Cycle >15000



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20319 4000K DAY WHITE 20320 6500K WHITE	VT-9-116S	100W	11500	4 pcs		250x97.2mm
2120319 4000K DAY WHITE	VT-9-116S-1	100W	16000	1 pcs		250x94mm
20322 6500K WHITE	VT-9-156S	150W	17300	4 pcs		295x97.7mm
2120321 4000K DAY WHITE	VT-9-156S-1	150W	24000	1 pcs		295x94mm
20324 6500K WHITE	VT-9-206S	200W	23000	4 pcs		320x98.2mm
2120323 4000K DAY WHITE	VT-9-206S-1	200W	32000	1 pcs		320x94mm

05
YEAR
WARRANTY

IK07
RATING

IP54
RATING




Our series of LED LowBay fixtures allow parallel lighting on supermarket aisles, workshops, warehouses, and factories. Lowbay lights have proven to be approximately 50% more efficient than perpendicular lighting layouts, also decreasing eye strain. Compared to its traditional counterparts, this range offers ample light options promising impressive energy-savings with efficiency ratings of up to 120 lm/W. Available in 100W to 200W.

LED LINEAR LOWBAY LIGHTS

- AC:220-240v,50HZ
- On/off: >20,000 times
- IP54 rating
- Lifespan - 30,000 hrs
- Aluminium body
- Heat and Shock Resistant.
- Ideal for workshops, supermarkets, warehouses, etc.
- PF: >0.9
- CRI:>80
- Beam Angle: 112°



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21891 4000K DAY WHITE 21892 6500K WHITE	VT-9-112-N	100W	9800	9 pcs		537x130x96mm



LED LINEAR LOW BAY LIGHTS



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21893 4000K DAY WHITE	VT-9-152-N	150W	14500	6 pcs		798x130x96mm



SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
895 4000K DAY WHITE 896 6000K WHITE	VT-9-202	200W	24000	6 pcs		1059x130x96mm

21895 4000K DAY WHITE 21896 6500K WHITE	VT-9-202-N	200W	19500	6 pcs		1059x130x96mm
--	------------	------	-------	-------	--	---------------



V-TAC
Meaningful Innovation.



LED Panels

All models in the PRO Series LED panel series are made with high quality PMMA diffusers which provide a evenly distributed light and prevents the panels from turning yellow.

The panels' durability is evidenced by exteriors composed of an innovative combination of aluminium+PMMA+PP, and further energy savings thanks to the upgraded driver box and Samsung LEDs. Both frameless and big panels include a quick connector for easy installation.

Key Features

- Quick connector included
- Flicker-free; stable drivers eliminate flashes
- Better light quality, fewer false colour plots
- 80% lower power consumption than conventional downlights
- Standard dimensions for big panels available
- A variety of both square and round frameless mini panels to choose from.



LED PANELS




05
YEAR
WARRANTY

PMMA
DIFFUSER

FLICKER
FREE

Quick
CONNECTOR



Our LED panels are made with high-quality PMMA diffusers which prevents them from turning yellow over time and makes them emit strong and evenly distributed light. Also available in the TP(a)-rated panel to meet fire safety standards. All our LED panels have quick connectors that will save installation time and costs.

LED PANELS 60X60

- IP20 Rating.
 - SMD-Samsung Chip
 - 5 Years Warranty
 - AC:200-240V, 50/60Hz
 - Body Type: Aluminium + PMMA + PP
- CRI >80
 - PF>0.9
 - 50,000 hr lifespan
 - On/Off Cycle >25000

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Size
21200471 4000K DAY WHITE	VT-629-N	26W	3480	110°	6 pcs	595x595x12.5mm
20047 4000K DAY WHITE 20048 6400K WHITE	VT-629	29W	3480	120°	6 pcs	595x595x13mm
2163300 4000K DAY WHITE 2163411 6400K WHITE	VT-645-N	40W	4950	110°	6 pcs	595x595x12.5mm




05
YEAR
WARRANTY

120
LUMEN/W

HIGH LUMEN LED
PANELS

- IP20 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:200-240V, 50/60Hz
- Body Type: Aluminium
- 110° Beam Angle
- CRI >80
- PF>0.9
- 30,000 hr lifespan
- On/Off Cycle >15000



SKU	Model	Watts	Lumens	Box Qty	Size
20419 4000K DAY WHITE	VT-629-1	29W	3480	6 pcs	595x595x9mm




05
YEAR
WARRANTY

UGR<19

PMMA
DIFFUSER

UGR<19 LED
PANELS-60X60

- IP20 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:200-240V, 50/60Hz
- Body Type: Aluminium + PMMA + PP
- 110° Beam Angle
- CRI >80
- PF>0.9
- 50,000 hr lifespan
- On/Off Cycle >25000



SKU	Model	Watts	Lumens	Box Qty	Size
20119 4000K DAY WHITE	VT-649	45W	3600	6 pcs	595x595x13.5mm




LED PANELS




LED PANELS

- IP20 Rating.
 - SMD-Samsung Chip
 - 5 Years Warranty
 - AC:200-240V, 50/60Hz
 - Body Type: Aluminium
- 110° Beam Angle
 - CRI >80
 - PF>0.9
 - 30,000 hr lifespan
 - On/Off Cycle >15000




SKU	Model	Watts	Lumens	Box Qty	Size
20421 4000K DAY WHITE 20420 6400K WHITE	VT-645-1	45W	4830	6 pcs	595x595x9mm

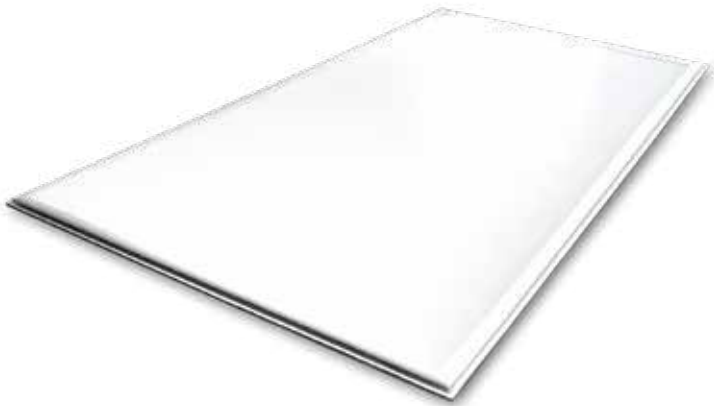

HIGH LUMEN LED
PANELS 120X60

- IP20 Rating.
 - SMD-Samsung Chip
 - 5 Years Warranty
 - AC:200-240V, 50/60Hz
 - Body Type: Aluminium + PMMA + PP
- 110° Beam Angle
 - CRI >80
 - PF>0.9
 - 50,000 hr lifespan
 - On/Off Cycle >25000



SKU	Model	Watts	Lumens	Box Qty	Size
21748 4000K DAY WHITE 21749 6400K WHITE	VT-646-N	40W	5400	2 pcs	1195x595x12.5mm
749 6400K WHITE	VT-646	45W	5400	2 pcs	1195x595x12.5mm
217491 6500K WHITE	VT-646-1	45W	4950	2 pcs	1195x595x12.5mm



V-TAC
Meaningful Innovation.



LED Tubes & Fixtures

V-TAC's extensive range of efficient tubes & fixtures boasts premium quality LEDs provided by Samsung, a staggering lifespan of up to 30,000 hr, and an unbreakable body built with the most durable materials, and a wide range of lengths and sizes for different applications.

More innovative additions in this range include

- 1) TP(a) rated fixtures compatible with emergency packs & microwave sensors
- 2) Batten Fittings with CCT-changing Switch
- 3) Linkable T5 Batten Fittings, and more.
- 4) Waterproof Fittings

Key Features

- LEDs provided by Samsung
- Built with strong, durable materials
- TP(a) Rated fittings for select models
- Programmable DIP Switch Driver for select models
- Emergency Pack & Sensor Compatibility
- Linkable/Continuous T5 fittings
- CCT Changing Switch for select models





T8-NANO PLASTIC TUBES



Together with its impressive energy rating, our LED tubes offer a staggering 160 lumen per watt output and five years warranty — making it one of the most superior in the competitive led market.

EVOLUTION TUBES SERIES

- Nano Plastic
 - 25,000 hr lifespan
 - CRI - >80
 - Flicker Free
- PF - 0.5
 - On/Off Cycle - >15000 time
 - Input Voltage - AC:220-240V,50Hz
 - Beam angle:160 °

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
216474 3000K WARM WHITE 216475 4000K DAY WHITE 216476 6500K WHITE	VT-1607-N	7W	1000	25 pcs		28x600mm
216477 3000K WARM WHITE 216478 4000K DAY WHITE 216479 6500K WHITE	VT-1612-N	12W	1750	25 pcs		28x1200mm
6481 4000K DAY WHITE	VT-1615	15W	2400	25 pcs		27.9x1500mm
216480 3000K WARM WHITE 216481 4000K DAY WHITE 216482 6500K WHITE	VT-1615-N	15W	2150	25 pcs		28x1500mm



This modern range of high lumen LED tubes with Samsung LEDs are the perfect retrofit for fluorescent fixtures. This range offers strong and ample light with promising 120 lm/w options and impressive energy-saving features compared to its traditional counterparts.

G13-T8 - HIGH LUMEN NANO PLASTIC TUBES

- Nano Plastic Body
 - 30,000 hr lifespan
 - 160° Beam Angle
 - 15000 On/Off
- AC:220-240V,50Hz
 - CRI - >80
 - >0.5 PF
 - <0.5 s Instant start

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21798 3000K WARM WHITE 21686 4000K DAY WHITE 21687 6500K WHITE	VT-062-N	7.5W	850	25 pcs		600x28mm
673 6400K WHITE	VT-122	18W	2250	25 pcs		1200x27.9mm
21688 3000K WARM WHITE 21672 4000K DAY WHITE 21673 6500K WHITE	VT-122-N	16.5W	1850	25 pcs		1200x28mm
21799 3000K WARM WHITE 21674 4000K DAY WHITE 21675 6500K WHITE	VT-152-N	24W	3000	25 pcs		1500x28mm






LED TUBES



This modern range of LED tubes with Samsung LEDs are the perfect retrofit for fluorescent fixtures. These sets of tubes are available in standard lengths for general purpose lighting in residences, commercial establishments, supermarkets, and offices.

T8 PRO TUBES

- Nano Plastic Body
 - 30,000 hr lifespan
 - 160° Beam Angle
 - 15000 On/Off
- AC:220-240V,50Hz
 - CRI - >80
 - >0.5 PF
 - <0.5 s Instant start

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21650 3000K WARM WHITE 21651 4000K DAY WHITE 21652 6500K WHITE	VT-061-N	9W	850	25 pcs		600x28mm
21653 3000K WARM WHITE 21654 4000K DAY WHITE 21655 6500K WHITE	VT-121-N	18W	1850	25 pcs		1200x28mm
21656 3000K WARM WHITE 21657 4000K DAY WHITE 21658 6500K WHITE	VT-151-N	20W	2100	25 pcs		1500x28mm

05
YEAR
WARRANTY

EFFICIENCY
160
LUMENS/W



SLIM FITTINGS-EVOLUTION
SERIES-HIGH LUMEN

- IP20 Rating.
- SMD
- 5 Years Warranty
- AC:220-240V,50Hz
- Body Type: Plastic
- 120° Beam Angle
- CRI >80
- PF>0.7
- 25,000 hr lifespan
- On/Off Cycle >15000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20359 3000K WARM WHITE 20360 4000K DAY WHITE 20361 6500K WHITE	VT-8315-N	15W	2250	30 pcs		600x75x24mm
20362 3000K WARM WHITE 20363 4000K DAY WHITE 20364 6500K WHITE	VT-8330-N	30W	4650	30 pcs		1200x75x24mm
6494 4000K DAY WHITE	VT-8338	38W	6080	30 pcs		1500x74.1x24.4mm
20365 3000K WARM WHITE 20366 4000K DAY WHITE 20367 6500K WHITE	VT-8338-N	38W	5900	30 pcs		1500x75x24mm



LED BATTEN FITTINGS



The tried-and-true 10W to 60W range of efficient and powerful LED prismatic fittings from V-TAC. Some have a high lumen rating of 120 lm/w and are equipped with quick connectors to shorten set-up time during installation. Available in 3000K, 4000K, and 6400K color temperatures, these durable fittings are ideal for any indoor lighting use.

SLIM FITTINGS

- SMD LED Type
 - 30,000 hr lifespan
 - 120° Beam Angle
 - 15000 On/Off
- AC:220-240V,50Hz
 - CRI: >80
 - PF >0.5(10W, 20W) >0.9(40W, 50W,60W)
 - Plastic Body
 - <1s Instant start

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
661 6400K WHITE	VT-8-10	10W	1200	10 pcs		300x74.1x24.4mm
20344 3000K WARM WHITE 20345 4000K DAY WHITE 20346 6500K WHITE	VT-8-10-N	10W	1000	30 pcs		300x75x24mm
663 4000K DAY WHITE	VT-8-20	20W	2400	10 pcs		600x74.1x24.4mm
20347 3000K WARM WHITE 20348 4000K DAY WHITE 20349 6500K WHITE	VT-8-20-N	20W	2050	30 pcs		600x75x24mm
20350 3000K WARM WHITE 20351 4000K DAY WHITE 20352 6500K WHITE	VT-8-40-N	40W	4300	30 pcs		1200x75x24mm
20353 3000K WARM WHITE 20354 4000K DAY WHITE 20355 6500K WHITE	VT-8-50-N	50W	6000	30 pcs		1500x75x24mm
20356 3000K WARM WHITE 21670 4000K DAY WHITE 21671 6500K WHITE	VT-8-60-N	60W	7200	30 pcs		1800x24x75mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.

NEW



LED BATTEN FITTINGS

- 3 power levels selectable using DIP switch
- CCT change (3000K/4000K/6500K) via DIP switch



Standard Fittings

- SMD Samsung LED Chip
- 50,000-hour lifespan
- 120° Beam Angle
- AC:220-240V, 50Hz
- 135LM/W
- IK08
- PC+Iron
- PF>0.9
- CRI>80

Microwave Sensor

- Microwave Sensor
- Detection Area: 50%/100%
- Stand-by Dimming level: 0%/20%
- Stand-by Period: 15 mins/+∞
- Hold Time: 5s/1 min/3 min/10 min
- Daylight Threshold: 30 Lux/Disable
- Detection Range: 12M (Max)
- Detection Angle: Side Wall <150°/Ceiling Mount 360°



Emergency Backup

- Battery Type: 6.4V, LiFePO4, 18730 2000mAh
- Battery Charge Voltage: DC:9V
- Battery Current: 30~400 mA
- Battery Discharge Voltage: DC 6.0~8.2V
- Battery Discharge Current: 350~700 mA
- Charging Time: > 12Hours
- Working Time: > 3Hours
- Test Function: Manual

Optional(Not included)

SKU:7814

REMOTE
CONTROLLER

Compatible with


 VT-4004S / VT-4004SE
 VT-4005S / VT-4005SE
 VT-4006S / VT-4006SE




LED BATTEN FITTINGS




NEW LED BATTEN FITTINGS - 4 FEET




SKU	Model	Watts	Lumens	Box Qty
7011 3IN1	VT-4004	20W 30W 40W	3000K - 2500 lm 4000K - 2800 lm 6500K - 2700 lm 3000K - 3600 lm 4000K - 4200 lm 6500K - 3750 lm 3000K - 4600 lm 4000K - 5400 lm 6500K - 4800 lm	6 pcs
7012 3IN1	VT-4004S (Sensor)	20W 30W 40W	3000K - 2500 lm 4000K - 2800 lm 6500K - 2700 lm 3000K - 3600 lm 4000K - 4200 lm 6500K - 3750 lm 3000K - 4600 lm 4000K - 5400 lm 6500K - 4800 lm	6 pcs
7013 3IN1	VT-4004E (Emergency Battery)	20W 30W 40W	3000K - 2500 lm 4000K - 2800 lm 6500K - 2700 lm 3000K - 3600 lm 4000K - 4200 lm 6500K - 3750 lm 3000K - 4600 lm 4000K - 5400 lm 6500K - 4800 lm	6 pcs
7014 3IN1	VT-4004SE (Sensor+Emergency Battery)	20W 30W 40W	3000K - 2500 lm 4000K - 2800 lm 6500K - 2700 lm 3000K - 3600 lm 4000K - 4200 lm 6500K - 3750 lm 3000K - 4600 lm 4000K - 5400 lm 6500K - 4800 lm	6 pcs

NEW LED BATTEN FITTINGS - 5 FEET



SKU	Model	Watts	Lumens	Box Qty
7015 3IN1	VT-4005	30W 40W 50W	3000K - 3750 lm 4000K - 4200 lm 6500K - 4050 lm 3000K - 4800 lm 4000K - 5600 lm 6500K - 5000 lm 3000K - 5750 lm 4000K - 6750 lm 6500K - 6000 lm	6 pcs
7016 3IN1	VT-4005S (Sensor)	30W 40W 50W	3000K - 3750 lm 4000K - 4200 lm 6500K - 4050 lm 3000K - 4800 lm 4000K - 5600 lm 6500K - 5000 lm 3000K - 5750 lm 4000K - 6750 lm 6500K - 6000 lm	6 pcs
7017 3IN1	VT-4005E (Emergency Battery)	30W 40W 50W	3000K - 3750 lm 4000K - 4200 lm 6500K - 4050 lm 3000K - 4800 lm 4000K - 5600 lm 6500K - 5000 lm 3000K - 5750 lm 4000K - 6750 lm 6500K - 6000 lm	6 pcs
7018 3IN1	VT-4005SE (Sensor+Emergency Battery)	30W 40W 50W	3000K - 3750 lm 4000K - 4200 lm 6500K - 4050 lm 3000K - 4800 lm 4000K - 5600 lm 6500K - 5000 lm 3000K - 5750 lm 4000K - 6750 lm 6500K - 6000 lm	6 pcs

NEW LED BATTEN FITTINGS - 6 FEET



SKU	Model	Watts	Lumens	Box Qty
7019 3IN1	VT-4006	40W 50W 60W	3000K - 5000 lm 4000K - 5800 lm 6500K - 5400 lm 3000K - 6000 lm 4000K - 7000 lm 6500K - 6250 lm 3000K - 6900 lm 4000K - 8100 lm 6500K - 7200 lm	6 pcs
7020 3IN1	VT-4006S (Sensor)	40W 50W 60W	3000K - 5000 lm 4000K - 5800 lm 6500K - 5400 lm 3000K - 6000 lm 4000K - 7000 lm 6500K - 6250 lm 3000K - 6900 lm 4000K - 8100 lm 6500K - 7200 lm	6 pcs
7021 3IN1	VT-4006E (Emergency Battery)	40W 50W 60W	3000K - 5000 lm 4000K - 5800 lm 6500K - 5400 lm 3000K - 6000 lm 4000K - 7000 lm 6500K - 6250 lm 3000K - 6900 lm 4000K - 8100 lm 6500K - 7200 lm	6 pcs
7022 3IN1	VT-4006SE (Sensor+Emergency Battery)	40W 50W 60W	3000K - 5000 lm 4000K - 5800 lm 6500K - 5400 lm 3000K - 6000 lm 4000K - 7000 lm 6500K - 6250 lm 3000K - 6900 lm 4000K - 8100 lm 6500K - 7200 lm	6 pcs



V-TAC's all-new range of LED Batten Fittings designed with LED chips by Samsung.

LED BATTEN FITTINGS IP20

- SMD LED Chip
- 30,000 hr lifespan
- 120° Beam Angle
- AC:220-240V, 50Hz
- 120LM/W
- CRI >80
- PF >0.9 (Above 24W models)
- Built with safety belt for easy installation
- Instant start 0-100% in <1s
- On/Off Cycles >15000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20066 4000K DAY WHITE 20067 6400K WHITE	VT-8-24	24W	2880	12 pcs		1166x60mm
20070 4000K DAY WHITE	VT-8-28	28W	3360	10 pcs		1466x60mm
2120070 4000K DAY WHITE 2120071 6500K WHITE	VT-8-28-N	28W	3360	10 pcs		1466x60mm
20068 4000K DAY WHITE 20069 6400K WHITE	VT-8-44	40W	4800	12 pcs		1166x60mm
20072 4000K DAY WHITE 20073 6400K WHITE	VT-8-54	50W	6000	10 pcs		1466x60mm
2120073 6400K WHITE	VT-8-54-N	50W	6000	8 pcs		1466x60mm
20075 6400K WHITE	VT-8-64	60W	7200	8 pcs		1766x60mm
2120074 4000K DAY WHITE 2120075 6500K WHITE	VT-8-64-N	60W	7200	8 pcs		1766x60mm



LED BATTEN FITTINGS



V-TAC's all-new range of LED Batten Fittings designed with LED chips by Samsung deliver high-performance light output. These fittings are built strong using iron and polycarbonate. In addition, the luminaires are also TP(a) rated to comply with fire safety standards. A microwave sensor especially designed for these LED Batten Fittings is also available.

LED BATTEN FITTINGS TP(A)

- Tp(A) Rated
- 30,000 hr lifespan
- CRI - >80
- PF - 0.9
- On/Off Cycle - >15000 time
- Input Voltage - AC:220-240V,50Hz
- Programmable DIP Switch Driver

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
757 4000K DAY WHITE	VT-8-80	80W	8600	10 pcs		1840x70x66mm



MICROWAVE SENSOR (OPTIONAL)

- | | |
|-----|--|
| SKU | <ul style="list-style-type: none">• Detection area: 4M (@3M MOUNTING HEIGHT)• Detection angle: 150°(WALL) 360°(CEILING)• Hold time: 5S / 30S / 90S / 3MIN / 30MIN• Emergency Pack designed for V-TAC's range of Samsung Batten LED Tube |
| 759 | |



BATTEN FITTINGS CCT

- PC+Aluminium+Steel
- 30,000 hr lifespan
- CRI - >80
- Flicker Free
- PF - 0.9
- On/Off Cycle - >20000 time
- Input Voltage - AC:220-240V,50Hz
- Beam angle:120 °

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
517 3IN1	VT-8-43	40W	4000	10 pcs		1227x62x71mm

519 3IN1	VT-8-63	60W	6000	10 pcs		1791x62x71mm
------------	---------	-----	------	--------	--	--------------



SLIM BATTEN FITTINGS

- Tp(A) Rated
- 30,000 hr lifespan
- CRI - >80
- PF - 0.9
- On/Off Cycle - >15000 time
- Input Voltage - AC:220-240V,50Hz
- Programmable DIP Switch
- Emergency pack (applicable for 60W model only)

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
753 4000K DAY WHITE	VT-8-41	40W	4800	4 pcs		1220x185x76mm

754 4000K DAY WHITE	VT-8-61	60W	7200	4 pcs		1524x185x76mm
-----------------------	---------	-----	------	-------	--	---------------



LED BATTEN FITTINGS



LINKABLE
UP TO 100 WATTS

The new T5 Batten Fittings retain the premium qualities of V-TAC’s LED fixtures. Multiple batten fittings can be linked, making them an efficient alternative lighting fixture for indoor spaces of any size.

T5 BATTEN FITTINGS

- 30,000 hr lifespan
 - On/Off switch
 - On/Off Cycle - >15000 time
 - Body:PC
- Input Voltage - AC:220-240V
 - CRI - >80
 - Instant start -0-100% in <1 sec
 - Beam angle:120 °

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
689 3000K WARM WHITE 690 4000K DAY WHITE 691 6400K WHITE	VT-035	4W	360	25 pcs		320x30mm
21689 3000K WARM WHITE 21690 4000K DAY WHITE 21691 6500K WHITE	VT-035-N	4W	360	25 pcs		307 x36x90mm
692 3000K WARM WHITE 694 6400K WHITE	VT-065	7W	630	25 pcs		580x30mm
21692 3000K WARM WHITE 21693 4000K DAY WHITE 21694 6500K WHITE	VT-065-N	7W	630	25 pcs		567x36x90mm
696 4000K DAY WHITE 697 6400K WHITE	VT-125	16W	1440	25 pcs		1180x30mm
21695 3000K WARM WHITE 21696 4000K DAY WHITE 21697 6500K WHITE	VT-125-N	16W	1440	25 pcs		1167x36x90mm



05
YEAR
WARRANTY





IP65
RATING

EFFICIENCY
160
LUMENS/W

With its IP65 rating and tough exterior, the Waterproof Fittings are the optimal choice for a strong and durable fitting for both indoor and outdoor lighting. Available in 4ft, 5ft, and 6ft, these Waterproof Fittings are ideal for illuminating open spaces that are frequently exposed to dust and moisture.


WATERPROOF FITTINGS

- SMD LED Type
- 30,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- CRI: >70
- PF: >0.9

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
6486 6400K WHITE	VT-1524	24W	3840	12 pcs		1200x65x58mm
216485 4000K DAY WHITE 216486 6500K WHITE	VT-1524-N	24W	3840	12 pcs		1200x65x58mm
6484 6400K WHITE	VT-1532	32W	5120	12 pcs		1500x65x58mm
216483 4000K DAY WHITE 216484 6500K WHITE	VT-1532-N	32W	5120	12 pcs		1500x65x58mm



LED WATERPROOF BATTEN FITTINGS

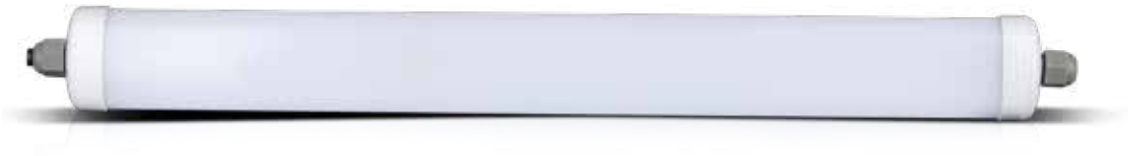


05
YEAR
WARRANTY

IP65
RATING

WATERPROOF FITTINGS-
180CM

- SMD LED Type
- 30,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- CRI: >80
- PF: >0.9

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
680 4000K DAY WHITE 681 6400K WHITE	VT-180	60W	5400	9 pcs		1800x66x58mm




05
YEAR
WARRANTY

IP65
RATING

120
LUMEN/W

WATERPROOF FITTINGS-
HIGH LUMENS

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:200-240V,50Hz
- Body Type: Aluminium+Plastic
- 110° Beam Angle
- CRI >80
- PF>0.9
- 30,000 hr lifespan
- On/Off Cycle >20000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
21678 4000K DAY WHITE 21679 6000K WHITE	VT-160-N	60W	7200	9 pcs		1200x86x70mm
21676 4000K DAY WHITE 21677 6000K WHITE	VT-170-N	70W	8400	6 pcs		1500x86x70mm

NEW



05
YEAR
WARRANTY


IP65
RATING


120
LUMEN/W

POLYCARBONATE
PC

WATERPROOF FITTINGS

- IP65 Rating.
- SMD-Samsung Chip
- 5 Years Warranty
- AC:220-240V
- Body Type: PC
- 120° Beam Angle
- CRI >80
- PF>0.9
- 30,000 hr lifespan
- On/Off Cycle >20000

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20473 4000K DAY WHITE 20474 6500K WHITE	VT-120060	60W	7200	12 pcs		1200x78x72mm

20475 4000K DAY WHITE 20476 6500K WHITE	VT-150070	70W	8400	12 pcs		1500x78x72mm
--	-----------	-----	------	--------	--	--------------



EMERGENCY
BATTERY
BACKUP



03
YEAR
WARRANTY


IP65
RATING


120
LUMEN/W

POLYCARBONATE
PC

EMERGENCY
WATERPROOF
FITTINGS

- 20,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- Battery Type:9.6V 2200mAh Ni-Cd battery
- Charging Time:24Hours
- Working Time:3Hours
- Emergency Power: 6-7W
- SMD LED Chip
- Body Type: PC
- On/Off Cycles >15000
- CRI >80
- PF >0.9
- IP65
- SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
2120223 4000K DAY WHITE 2120222 6400K WHITE	VT-120136E-N	36W	4320	12 pcs		1285x365x255mm

2120221 4000K DAY WHITE 2120220 6400K WHITE	VT-150148E-N	48W	5760	12 pcs		1585x365x255mm
--	--------------	-----	------	--------	--	----------------



LED WATERPROOF BATTEN FITTINGS



- Waterproof Fitting designed with Lumen efficiency 120LM/W
- High power Samsung SMD-Chip technology makes the fitting reliable and durable
- Strong and sturdy PC body with Stainless Steel Clips
- Built in microwave sensor with 4 modes for optimal performance
- Protection from water, dust and corrosion - IP65 Rated
- Designed for maximum efficiency & minimal glare
- Suitable for parking lots, warehouses, garages, storage docks, workshops etc.

WATERPROOF FITTINGS WITH SENSOR

- SMD LED Chip
- 20,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- On/Off Cycles >15000
- 50%/100% Detection Distance
- 5s,1min,3min,10min Hold Time
- Body Type: PC
- CRI >80
- PF >0.9
- IP65
- SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20468 4000K DAY WHITE 20469 6400K WHITE	VT-120136S	36W	4320	12 pcs		1200x78x72mm

20470 4000K DAY WHITE 20471 6400K WHITE	VT-150148S	48W	5760	12 pcs		1500x78x72mm
--	------------	-----	------	--------	--	--------------

*Suitable for use up to 10-12 hours daily, constant use of the product will void the warranty.



03 YEAR
WARRANTY

IP65
RATING

120
LUMEN/W


STAINLESS
STEEL CLIPS

POLYCARBONATE
PC

Promoting efficiency with its high lumen (120 lm/W) rating, this new addition to V-TAC's fixtures range is reinforced with secure, stainless steel clips for sturdy mounting and easy maintenance. The opaque cover allows a brighter, well-distributed light that is perfect for task lighting.

OPAQUE COVER - M SERIES SS CLIPS

- SMD LED Chip
- 20,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- On/Off Cycles >15000
- Body Type: PC
- CRI >80
- PF >0.9
- IP65
- SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20219 4000K DAY WHITE 20218 6400K WHITE	VT-120136-T	36W	4320	12 pcs		1285x365x255mm
20213 4000K DAY WHITE 20212 6400K WHITE	VT-150148-T	48W	5760	12 pcs		1585x365x255mm

MICROWAVE SENSOR



- SKU

6622
- Rod antenna - DIP Switch
 - Max Watts: 100W
 - Hold Time: 5s/1min/3min/10min
 - Daylight threshold: 30Lux/Disable
 - Detection Area: 50%/100%
 - Automatic On/Off control with daylight sensor.
 - Loop in and loop out for easy installation.
 - Operating Voltage: AC:220-240V, 50/60Hz
 - Detection Range: ø4-10m/13.12-32.8ft (ceiling mounted)
 - Compatible with V-TAC's LED Waterproof Fitting - M Series SS Clips



LED WATERPROOF BATTEN FITTINGS



MILKY COVER - M SERIES SS CLIPS

- SMD LED Chip
 - 20,000 hr lifespan
 - 120° Beam Angle
 - AC:200-240V,50/60Hz
 - On/Off Cycles >15000
- Body Type: PC
 - CRI >80
 - PF >0.9
 - IP65
 - SS Clips

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
2120217 4000K DAY WHITE 2120216 6400K WHITE	VT-120136-M-N	36W	4320	12 pcs		1285x365x255mm
20215 4000K DAY WHITE	VT-150148-M	48W	5760	12 pcs		1585x365x255mm
2120215 4000K DAY WHITE 2120214 6400K WHITE	VT-150148-M-N	48W	5760	12 pcs		1585x365x255mm

EMERGENCY PACK



- SKU

8343
- Input Voltage: AC:220-240V,50/60Hz
 - Charging Time: 24 Hours
 - Emergency Power: 6-7W
 - Emergency Operation time: 3 Hours
 - Battery Type: Ni-Cd 9.6V 2200mAh
 - Size: 212x40x30mm
 - Compatible with V-TAC's LED Waterproof Fitting - M Series SS Clips Milky Cover



03
YEAR
WARRANTY



IP65
RATING

120
LUMEN/W

This new addition to V-TAC's fixtures range promotes efficiency with its high lumen to watt ratio (120 lm/W). The transparent cover delivers a brighter, well-distributed light that is perfect for task lighting.

TRANSPARENT COVER - M
SERIES

- SMD LED Chip
- 20,000 hr lifespan
- 120° Beam Angle
- AC:200-240V,50/60Hz
- On/Off Cycles >15000
- CRI >80
- PF >0.9
- IP65
- Body Type: ABS+PC

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20209 4000K DAY WHITE 20208 6400K WHITE	VT-60018-T	18W	2160	12 pcs		685x365x255mm
20205 4000K DAY WHITE 20204 6400K WHITE	VT-120036-T	36W	4320	12 pcs		1285x365x255mm
20201 4000K DAY WHITE 20200 6400K WHITE	VT-150048-T	48W	5760	12 pcs		1585x365x255mm



LED WATERPROOF BATTEN FITTINGS



03
YEAR
WARRANTY

IP65
RATING

120
LUMEN/W


This new addition to V-TAC's fixtures range promotes efficiency with its high lumen to watt ratio (120 lm/W) .The milky cover provides a softer, better-diffused light that is milder on the eyes.

MILKY COVER -M SERIES

- SMD LED Chip
 - 20,000 hr lifespan
 - 120° Beam Angle
 - AC:200-240V,50/60Hz
 - On/Off Cycles >15000
- CRI >80
 - PF >0.9
 - IP65
 - Body Type: ABS+PC

SKU	Model	Watts	Lumens	Box Qty	Diagram	Size
20210 6400K WHITE	VT-60018-M	18W	2160	12 pcs		685x365x255mm
2120211 4000K DAY WHITE 2120210 6400K WHITE	VT-60018-M-N	18W	2160	12 pcs		685x365x255mm
2120207 4000K DAY WHITE 2120206 6400K WHITE	VT-120036-M-N	36W	4320	12 pcs		1285x365x255mm
20202 6400K WHITE	VT-150048-M	48W	5760	12 pcs		1585x365x255mm
2120203 4000K DAY WHITE 2120202 6400K WHITE	VT-150048-M-N	48W	5760	12 pcs		1585x365x255mm

*Suitable for use up to 10-12 hours daily. constant use of the product will void the warranty.

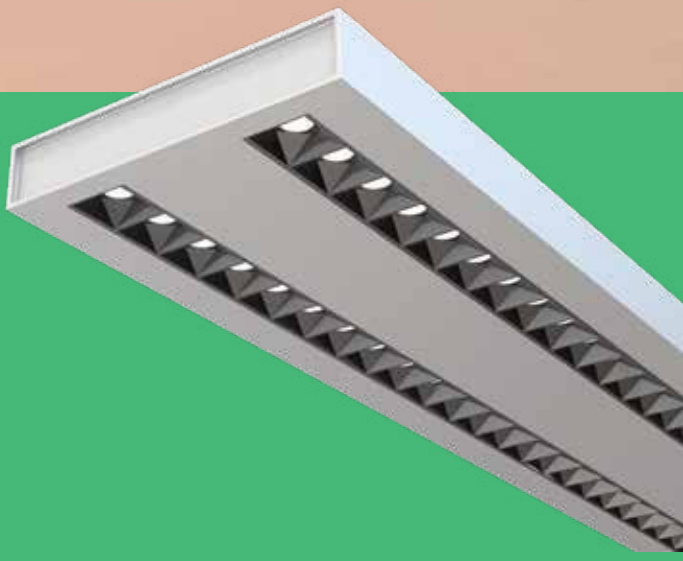

V-TAC
Meaningful Innovation.

SAMSUNG
LED
Illuminated

LED Linear Lights

V-TAC LED Linear Lights are an energy-efficient, low-maintenance alternative to traditional linear fluorescent fixtures in industrial, commercial, and light assembly applications. It is the optimal solution for conventional lighting systems and excellent for new installations due to its low installation cost.

Key Features

- Saves 80% energy
- No ultraviolet or infrared radiation
- Flexible, Compact & Adjustable design
- No lead or mercury content – environmentally friendly
- Provides uniform illumination & enhances the appeal of any environment
- Continuous row modular system






NEW

LINEAR HANGING LIGHTS ADJUSTABLE HEIGHT

Linear hanging lights with adjustable height are a stylish and functional lighting solution for various spaces, including dining rooms, kitchen islands, conference rooms, and more. These lights typically feature a linear arrangement of multiple light fixtures suspended from a single canopy, creating a sleek and modern aesthetic. The adjustable height feature allows you to customize the lighting arrangement according to your needs and the specific requirements of your space.

- 50cm to 2m height adjustment
- CCT 3IN1
- PS+Aluminium Body
- 100° Beam Angle
- 30,000 hr Lifespan
- IP20

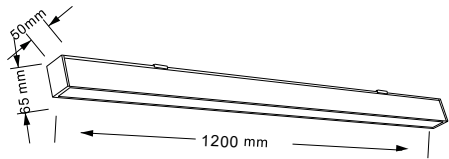


SKU	Unit Color	Model	Watts	Lumens	Size
10468 3IN1	Black	VT-7-44-B	40W	3400	1200x50x65mm
10469 3IN1	White	VT-7-44-W	40W	3400	1200x50x65mm

UP & DOWN LINEAR HANGING LIGHTS

This modern range of suspended linear lights has up & down illumination for a more evenly distributed light that creates a subtle ambience yet sufficient lighting for any commercial setting. Linear up & down lights are offered in two colour variants - silver and white.

- 30,000 hr Lifespan
- AC:100-240V,50/60Hz
- Aluminium Body
- Linkable with connectors
- 1-10V Dimmable
- Beam angle: Up-110°, Down-50°
- 1.5 Meter Wire Length



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
609 4000K DAY WHITE	Silver	VT-7-62-S	UP 30W DOWN 30W	UP-3300 DOWN-3300	4	1190x160x30mm
608 4000K DAY WHITE	White	VT-7-62-W	UP 30W DOWN 30W	UP-3300 DOWN-3300	4	1190x160x30mm




LED LINEAR LIGHTS



UP & DOWN LINEAR LIGHTS (NON-LINKABLE)

This modern range of suspended linear lights has up & down illumination for a more evenly distributed light that creates a subtle ambience yet sufficient lighting for any commercial setting. Linear up & down lights are offered in two colour variants - silver and white.

- 30,000 hr Lifespan
- AC:100-240V,50Hz
- Aluminium Body
- 1-10V Dimmable
- 1.5 Meter Wire Length
- Beam angle: Up-110°, Down-50°



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
607 4000K DAY WHITE	Silver	VT-7-61-S	UP 30W DOWN 30W	UP-3300 DOWN-3300	8	1179x64x35mm
606 4000K DAY WHITE	White	VT-7-61-W	UP 30W DOWN 30W	UP-3300 DOWN-3300	8	1179x64x35mm

LINEAR SURFACED LIGHTS

Discover V-TAC's reliable 40W linear lights. Designed with excellent heat dissipation, these fixtures boast a staggering 30,000h lifespan and efficient LEDs provided by Samsung, making them the perfect replacement for traditional, inefficient linear lights.

- 30,000 hr Lifespan
- UGR<19
- Linkable with connectors
- 120° Beam Angle



SKU	Unit Color	Model	Watts	Lumens	Box Qty
20462 3000K WARM WHITE	Black	VT-7-46	40W	3400	12
20463 4000K DAY WHITE					
20464 6400K WHITE					

LINEAR 3IN1 LIGHTS

Discover V-TAC's reliable 40w suspended linear lights with a staggering lifespan of 30,000-hours. Designed with a toggle switch, 3IN1 color-changing light. Perfect replacement for traditional and inefficient linear lighting fixtures with the efficient LED provided by Samsung.

- 30,000 hr Lifespan
- AC:200-240V,50/60Hz
- Toggle switch - 3IN1 CCT
- Aluminium Body
- 1.5 Meter Wire Length




SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
20060 3IN1	Black	VT-7-44	40W	3200	12	1200x35x67mm

LINEAR HANGING LIGHTS (NON-DIMMABLE)

Discover V-TAC's reliable 40W linear lights. Designed with excellent heat dissipation, these fixtures boast a staggering 30,000h lifespan and efficient LEDs provided by Samsung, making them the perfect replacement for traditional, inefficient linear lights. Linear lights are offered in three colors variants Black, Silver and White.

- 30,000 hr Lifespan
- AC:200-240V,50/60Hz
- 1.5 Meter Wire Length
- Aluminium Body
- 120° Beam Angle

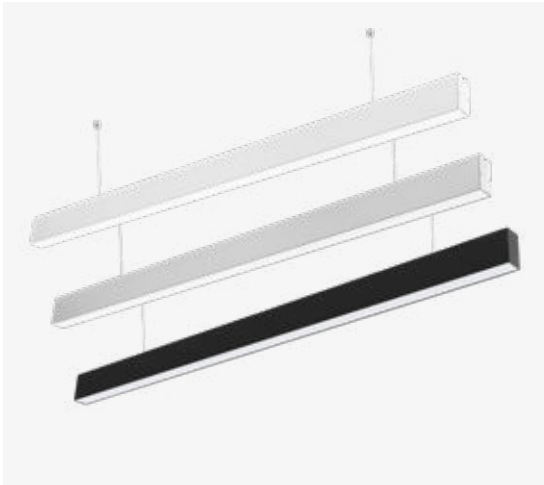

SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
882 3000K WARM WHITE 21374 4000K DAY WHITE 600 6000K WHITE	Black	VT-7-40-B	40W	3200	12	1200x35x67mm
21882 3000K WARM WHITE 21374 4000K DAY WHITE 21600 6400K WHITE	Black	VT-7-40-B-N	40W	3270	12	1194x35x67mm
21375 4000K DAY WHITE 21601 6400K WHITE	Silver	VT-7-40-S-N	40W	3300	12	1194x35x67mm
376 4000K DAY WHITE 602 6000K WHITE	White	VT-7-40-W	40W	3200	12	1200x35x67mm
21376 4000K DAY WHITE 21602 6400K WHITE	White	VT-7-40-W-N	40W	3360	12	1194x35x67mm



LED LINEAR LIGHTS



SLIM UP & DOWN LINEAR LIGHTS

This modern range of suspended linear lights has up & down illumination for a more evenly distributed light that creates a subtle ambient yet sufficient lighting for any commercial lighting. Linear up & down lights are offered in three colors variants Black, Silver and White.



- 30,000 hr Lifespan
- AC:200-240V,50/60Hz
- Aluminium Body
- 120° Beam Angle
- Linkable with connectors
- 0-10V Dimmable
- 1.5 Meter Wire Length



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
379 4000K DAY WHITE	Black	VT-7-60-B	UP 20W DOWN 40W	UP-2000 DOWN-4000	9	1200x75x105mm
378 4000K DAY WHITE	Silver	VT-7-60-S	UP 20W DOWN 40W	UP-2000 DOWN-4000	9	1200x75x105mm
377 4000K DAY WHITE	White	VT-7-60-W	UP 20W DOWN 40W	UP-2000 DOWN-4000	9	1200x75x105mm

SLIM LINEAR HANGING LIGHTS

Discover V-TAC's reliable 40w suspended linear lights with a staggering lifespan of 30,000-hours. Designed with excellent heat dissipation. Perfect replacement for traditional and inefficient linear lighting fixtures with the efficient LED provided by Samsung. Linear lights are offered in two colors variants Silver and White.



- 30,000 hr Lifespan
- UGR<19
- Linkable with connectors
- 120° Beam Angle
- Aluminium Body
- 0-10V Dimmable
- 1.5 Meter Wire Length



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
384 4000K DAY WHITE	Silver	VT-7-43-S	40W	3400	12	1200x50x75mm
21384 4000K DAY WHITE	Silver	VT-7-43-S-N	40W	3590	10	1197x50x75mm
383 4000K DAY WHITE	White	VT-7-43-W	40W	3400	12	1200x50x75mm

SLIM RECESSED LINEAR LIGHTS

Our new range of linear lights are also available for recessed installation, complete with necessary accessories for a seamless & continuous lighting system. Perfect replacement for traditional and inefficient linear lighting fixtures with the efficient LED provided by Samsung. Linear lights are offered in two colors variants Silver and White.

- 30,000 hr Lifespan
- AC:200-240V,50/60Hz
- Linkable with connectors



LINKABLE
UP TO 12 METERS






05
YEAR
WARRANTY



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
603 6000K WHITE	Silver	VT-7-41-S	40W	3200	9	1211x70x35mm
21380 4000K DAY WHITE	Silver	VT-7-41-S-N	40W	3800	9	1200x70x60mm
604 6000K WHITE	White	VT-7-41-W	40W	3200	9	1211x70x35mm
21381 4000K DAY WHITE	White	VT-7-41-W-N	40W	3620	9	1200x70x60mm

SLIM LINEAR CONNECTOR LIGHTS

• Smart connectors designed for V-TACs range of recessed linear lights • Robust Aluminium body • Allows easy linking with linear lights

	SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
	386 4000K DAY WHITE 385 4000K DAY WHITE	White:	VT-7-41-L	8W	800	8	
	388 4000K DAY WHITE 387 4000K DAY WHITE	White:	VT-7-41-LN	10W	1000	8	
	390 4000K DAY WHITE 389 4000K DAY WHITE	White:	VT-7-41-LW	12W	1000	8	
	392 4000K DAY WHITE 391 4000K DAY WHITE	White:	VT-7-41-T	14W	1200	4	
	394 4000K DAY WHITE 393 4000K DAY WHITE	White:	VT-7-41-X	16W	1600	4	



RECESSED LINEAR LIGHTS

Our new range of linear lights are also available for recessed installation, complete with necessary accessories for a seamless & continuous lighting system. Perfect replacement for traditional and inefficient linear lighting fixtures with the efficient LED provided by Samsung.

- 30,000 hr Lifespan
- AC:200-240V,50/60Hz
- Linkable with connectors



LINKABLE
UP TO 12 METERS

05
YEAR
WARRANTY



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
382 4000K DAY WHITE	White	VT-7-42-W	40W	4000	9	1211x90x35mm

RECESSED LINEAR CONNECTOR LIGHTS

• Smart connectors designed for V-TACs range of recessed linear lights • Robust Aluminium body • Allows easy linking with linear lights

	SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
	395 4000K DAY WHITE	White:	VT-7-42-L	10W	1000	8	
	396 4000K DAY WHITE	White:	VT-7-42-LN	10W	1000	8	
	397 4000K DAY WHITE	White:	VT-7-42-LW	12W	1000	8	
	398 4000K DAY WHITE	White:	VT-7-42-T	14W	1200	4	
	399 4000K DAY WHITE	White:	VT-7-42-X	16W	1600	4	

*Suitable for use up to 10-12 hr daily, constant use of the product will void the warranty.

MASTER TRUNKING


V-TAC's new Linear Trunking Light is a set of highly efficient, continuous linear light fixtures with a staggering 160 lm/w rating & a plug-and-play system. It provides an efficient, easy to assemble modular system which means that each unit can be easily connected to the Linear Master Trunking through L, T, and X node connectors. 90°, 120°, and double asymmetric lenses are available for maximum adaptability in any space. Perfect suspended lighting for supermarkets, warehouses, service centers, and gymnasiums. No warm-up time, instant start-up and consistent color temperature throughout long periods of usage.



05
YEAR
WARRANTY

DIMMABLE

160
LUMEN/W



SKU	Beam Angle	Model	Watts	Lumens	Box Qty	Size
1360 4000K DAY WHITE	WIDE 90°	VT-4551D	50W	8000	2	1500x60x74mm
1361 4000K DAY WHITE	FLAT 120°	VT-4551D-120	50W	8000	2	1500x60x77mm
1362 4000K DAY WHITE	DOUBLE ASYMMETRIC	VT-4551D-DL	50W	8000	2	1500x60x74mm



LED LINEAR TRUNKING LIGHT




FOLLOW TRUNKING



05
YEAR
WARRANTY

DIMMABLE

160
LUMEN/W



SKU	Beam Angle	Model	Watts	Lumens	Box Qty	Size
1363 4000K DAY WHITE	 WIDE 90°	VT-4550D	50W	8000	2	1700x60x74mm
1364 4000K DAY WHITE	 FLAT 120°	VT-4550D-120	50W	8000	2	1700x60x77mm
1365 4000K DAY WHITE	 DOUBLE ASYMMETRIC	VT-4550D-DL	50W	8000	2	1700x60x74mm



Linear Track Module

SKU	Box Qty
1382	5



End Cap

SKU	Box Qty
1366	200



Suspended Cord

SKU	Box Qty
1367	100



8 Wire-Feed In Male Connector

SKU	Box Qty
1368	200



L Node Connector

SKU	Box Qty
1383	8



S Line-Follow Trunking Rail

SKU	Box Qty
1451	10



S Line-PC Blank Cover

SKU	Box Qty
1452	35

*Suitable for use up to 10-12 hr daily, constant use of the product will void the warranty.

NEW


SURFACED LINEAR LIGHTS

Surface-mounted linear lights are a type of lighting fixture that is installed directly onto the surface of a ceiling or wall, providing a sleek and modern lighting solution.

- 20,000 hr Lifespan
- IK08
- Linkable upto 1000W
- PC+Aluminium Body
- 120° Beam Angle
- IP20



LINKABLE
UPTO 1000W



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
23000 4000K DAY WHITE 10137 6500K WHITE	Black	VT-4140-B	40W	4300	36	1200x50x55mm
10138 4000K DAY WHITE 23001 6500K WHITE	White	VT-4140-W	40W	4300	36	1200x50x55mm

LED LINEAR LIGHTS



NEW

CONNECTORS SURFACED LINEAR LIGHTS

	SKU	Unit Color	Watts	Lumens	Box Qty
	10140 4000K DAY WHITE 10141 6500K WHITE	Black	12W	1200	24
	10142 4000K DAY WHITE 10143 6500K WHITE	White	12W	1200	24
	23002 4000K DAY WHITE 10170 6500K WHITE	Black	10W	1000	50
	10171 4000K DAY WHITE 10172 6500K WHITE	White	10W	1000	50
	10173 4000K DAY WHITE 10174 6500K WHITE	Black	8W	800	50
	10175 4000K DAY WHITE 10176 6500K WHITE	White	8W	800	50



Power Cable 0.3m, 3*0.75mm²

SKU	Unit Color
10177	Black
10179	White



Power Cable 1.5m, 3*0.75mm²

SKU	Unit Color
10178	Black
10180	White



Power Cable with 2 plugs 2m, 3*0.75mm²

SKU	Unit Color
10181	Black
10182	White




Suspended Kit

SKU
10183



Recessed Kit

SKU
10184



Surface Mounted Kit

SKU
10185



V-TAC
Meaningful Innovation.

SAMSUNG
LED
Illuminated

LED Tracklights

Color has a massive influence on purchasing decisions and setting the mood in any room. Our innovative LED track lights are the premier choice for retail lighting with Samsung's state-of-the-art COB technology.

The >90 CRI rating of these track lights provides vivid colors, highly enhancing any product's appeal to customers.

Key Features

- Saves 80% energy
- No ultraviolet or infrared radiation
- Totally flexible, Compact & Adjustable design
- No lead or mercury content – environmentally friendly
- Provides uniform illumination & enhances the appeal of any environment.
- Greatly increased levels of performance and efficiency compared to older solutions such as high wattage halogen or HID light sources in retail and commercial lighting applications.






LED TRACKLIGHTS



LINEAR TRACKLIGHTS-BLACK BODY

Experience true colours through our LED Linear Tracklights efficient set of track lights with CRI >90, UGR<19 and flicker free. The latest LED technology from Samsung, and five years of warranty.

- 30,000 hr Lifespan
- 30° Beam Angle
- AC:220-240V,50Hz
- Flicker Free
- High CRI of > 90
- Aluminium Body
- UGR<19



05 YEAR WARRANTY

CRI 90

FLICKER FREE


UGR<19

SKU	Model	Watts	Lumens	Box Qty	Size
20000 2700K WARM WHITE 20001 4000K DAY WHITE	VT-416-B	12W	960	40	35x138mm
20006 2700K WARM WHITE 20007 4000K DAY WHITE	VT-431-B	25W	2000	20	35x270mm

LINEAR TRACKLIGHTS-WHITE BODY

Experience true colours through our LED Linear Tracklights efficient set of track lights with CRI >90, UGR<19 and flicker free. The latest LED technology from Samsung, and five years of warranty.

- 30,000 hr Lifespan
- 30° Beam Angle
- AC:220-240V,50Hz
- Flicker Free
- High CRI of > 90
- Aluminium Body
- UGR<19



05 YEAR WARRANTY

CRI 90

FLICKER FREE

UGR<19

SKU	Model	Watts	Lumens	Box Qty	Size
20003 2700K WARM WHITE 20004 4000K DAY WHITE	VT-416-W	12W	960	40	35x138mm
20009 2700K WARM WHITE 20010 4000K DAY WHITE	VT-431-W	25W	2000	20	35x270mm


*Suitable for use up to 10-12 hr daily, constant use of the product will void the warranty.



10 LINE TRACKLIGHTS

A complete range of durable 7w to 20w 4-line LED track lights with Aluminium body equipped with LED Chip by Samsung. These COB LEDs are also renowned for its high-CRI rating, perfect for retail lighting. Available in a stylish, clean white finish.

- COB LED Type
- 30,000 hr Lifespan
- 24° Beam Angle
- AC:220-240V,50Hz
- PF: >0.9
- High CRI of > 90
- Aluminium Body



SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
350 3000K WARM WHITE 351 4000K DAY WHITE 352 5000K WHITE	White	VT-407-W	7W	490	40	180x40.5x50mm
21351 4000K DAY WHITE	White	VT-407-W-N	7W	700	40	180x40.5x50mm
353 3000K WARM WHITE 354 4000K DAY WHITE 355 5000K WHITE	Black	VT-407-B	7W	420	40	180x40.5x50mm
21353 3000K WARM WHITE 21354 4000K DAY WHITE 21355 5000K WHITE	Black	VT-407-B-N	7W	700	40	180x40.5x50mm
357 4000K DAY WHITE 358 5000K WHITE	White	VT-415-W	15W	1200	40	200x50x50mm
21356 3000K WARM WHITE 21357 4000K DAY WHITE	White	VT-415-W-N	15W	1500	40	200x50x50mm
359 3000K WARM WHITE 360 4000K DAY WHITE	Black	VT-415-B	15W	1050	40	200x50x50mm
21359 3000K WARM WHITE 21360 4000K DAY WHITE 21361 5000K WHITE	Black	VT-415-B-N	15W	1500	40	200x50x50mm
362 3000K WARM WHITE 363 4000K DAY WHITE 364 5000K WHITE	White	VT-420-W	20W	1600	40	220x60x50mm
365 3000K WARM WHITE 366 4000K DAY WHITE 367 5000K WHITE	Black	VT-420-B	20W	1400	40	220x60x50mm
20486 4000K DAY WHITE	Black	VT-11035-B NEW	35W	3000	20	164x80x190mm




LED TRACKLIGHTS



4 LINE TRACKLIGHTS

Experience true colours through our LED Tracklights efficient set of track lights with CRI >90, the latest LED technology from Samsung, and five years of warranty.

- COB LED Type
- 30,000 hr Lifespan
- 24° Beam Angle
- AC:220-240V,50Hz
- PF: >0.9
- High CRI of > 90
- Aluminium Body



05 YEAR WARRANTY


CRI 90

SKU	Model	Watts	Lumens	Box Qty	Size
939 3000K WARM WHITE 940 4000K DAY WHITE	VT-418	18W	1260	20	Ø60x165x156mm
941 3000K WARM WHITE 942 4000K DAY WHITE	VT-430	30W	2100	20	Ø80x175x180mm

4 LINE SHUTTER TRACKLIGHTS

These durable 4-line LED track lights are equipped with shutters for flexibility — easily adjust them to achieve desired beam angle. These COB LEDs are also renowned for its high-CRI rating, perfect for retail lighting. Available in white and black body.

- COB LED Type
- 30,000 hr Lifespan
- 24°-60° Adjustable
- AC:220-240V,50Hz
- PF: >0.9
- High CRI of > 90
- Aluminium Body



05 YEAR WARRANTY

CRI 90

SKU	Unit Color	Model	Watts	Lumens	Box Qty	Size
371 3000K WARM WHITE 372 4000K DAY WHITE 373 5000K WHITE	Black	VT-433-B	33W	2640	8	Ø170x230x240mm
21371 3000K WARM WHITE 21372 4000K DAY WHITE	Black	VT-433-B-N	30W	3000	8	Ø170x230x240mm
368 3000K WARM WHITE 369 4000K DAY WHITE 370 5000K WHITE	White	VT-433-W	33W	2640	8	Ø170x230x240mm



V-TAC
Meaningful Innovation.

SAMSUNG
LED
Illuminated

LED Dome & Down Lights

V-TAC's LED Bulkhead range is inclusive of IP65-rated 2D bulkheads made of state-of-the-art polycarbonate resins for a premium water and dustproof surface-mounted luminaire.

Each model has powerful combinations of two useful features: the emergency battery backup and the microwave sensor with 120°D detection angle. Together with the new elegant designs, this luminaire's highlight is its competitive outdoor effectiveness in efficiency and security.

Key Features

- Built-in power eliminates the need for an external power supply
- IP65 and strong PC covers for durability
- 3 hr Emergency Operation Time
- Microwave sensors: up to 10m detection
- upto 30,000hr lifespan
- Fully compatible with daylight sensors
- Equipped with a green LED charging indicator



LED DOME LIGHTS



NEW



05 YEAR WARRANTY

IK08 RATING

IP65 RATING



LED BULKHEAD

8W
3000K - 800 Lumens
4000K - 875 Lumens
6500K - 875 Lumens

16W
3000K - 1550 Lumens
4000K - 1700 Lumens
6500K - 1700 Lumens

20W
3000K - 1800 Lumens
4000K - 2100 Lumens
6500K - 2100 Lumens

3 VARIABLE CCT
VARIABLE WATTS



MICROWAVE SENSOR



EMERGENCY BATTERY BACKUP

CCT Bulkhead

- SMD Samsung LED Chip
- 30,000 hr lifespan
- 110° Beam Angle
- AC:220-240V, 50Hz
- 5 Years Warranty
- PC
- IK08
- IP65

CCT Bulkhead-Sensor

- Hinged LED Gear Tray for Easy Installation
- Microwave Sensor
- Detection Distance: 3-6M, 6-10M Optional
- Dimmable functin: Yes,0,10%20%30% Optional
- Stand-by Period: 0s,10s,10min Optional
- Hold Time: 5s,90s,5min,10min Customised
- Daylight Sensor: Day,2lux,10lux,50lux Optional
- Detection Range: 10Mx6M (Max)
- Detection Angle: Wall Mount 120°/Ceiling Mount 360°
- Detection Motion Speed: 0.5-3m/s
- Manual Override: Available by dial switch

CCT Bulkhead With Emergency Backup

- Emergency Operation Time: >3 Hours
- Battery Standby Watts: >1.5 Watts
- Battery Charging Current: 60mA
- Battery Discharging Current: 200mA
- Battery Type: Ni-CD, 9.6V 1.0Ah Battery

SKU	Model	Name	Box Qty	Size
6851 3IN1	VT-8603	LED Bulkhead	10 pcs	Ø 315x75mm
6852 3IN1	VT-8613	LED Bulkhead With Sensor	10 pcs	Ø 315x75mm
6853 3IN1	VT-8623	LED Bulkhead With Emergency Backup	10 pcs	Ø 315x75mm
6854 3IN1	VT-8633	LED Bulkhead With Emergency Backup+Sensor	10 pcs	Ø 315x75mm

NEW



05
YEAR
WARRANTY

IK08
RATING

IP65
RATING

POLYCARBONATE
PC

LED BULKHEAD

8W
3000K - 1330 Lumens
4000K - 1460 Lumens
6500K - 1430 Lumens

16W
3000K - 2610 Lumens
4000K - 2900 Lumens
6500K - 2730 Lumens

20W
3000K - 3266 Lumens
4000K - 3483 Lumens
6500K - 3441 Lumens

3
VARIABLE CCT
VARIABLE WATTS

MICROWAVE
SENSOR

CCT Bulkhead

- SMD Samsung LED Chip
- 30,000 hr lifespan
- 110° Beam Angle
- AC:220-240V, 50Hz
- 5 Years Warranty
- PC
- IK08
- IP65

CCT Bulkhead-Sensor

- Hinged LED Gear Tray for Easy Installation
- Microwave Sensor
- Detection Distance: 3-6M, 6-10M Optional
- Dimmable functin: Yes,0,10%20%30% Optional
- Stand-by Period: 0s,10s,10min Optional
- Hold Time: 5s,90s,5min,10min Customised
- Daylight Sensor: Day,2lux,10lux,50lux Optional
- Detection Range: 10Mx6M (Max)
- Detection Angle: Wall Mount 120°/Ceiling Mount 360°
- Detection Motion Speed: 0.5-3m/s
- Manual Override: Available by dial switch

EMERGENCY
BATTERY
BACKUP

CCT Bulkhead With Emergency Backup

- Emergency Operation Time: >3 Hours
- Battery Standby Watts: >1.5 Watts
- Battery Charging Current: 60mA
- Battery Discharging Current: 200mA
- Battery Type: Ni-CD, 9.6V 1.0Ah Battery

SKU	Model	Name	Size
801-24 3IN1	VT-8603-24	LED Bulkhead	Ø 260 x90 mm
804-24 3IN1	VT-8613-24	LED Bulkhead With Sensor	Ø 260 x90 mm
806-24 3IN1	VT-8623-24	LED Bulkhead With Emergency Backup	Ø 260 x90 mm
812-24 3IN1	VT-8633-24	LED Bulkhead With Emergency Backup+Sensor	Ø 260 x90 mm



LED DOME LIGHTS



CCT SWITCHABLE BULKHEAD LIGHTS

- SMD LED Chip
- AC:200-240V,50/60Hz
- 30,000 hr lifespan
- 120° Beam Angle
- PC Body
- CRI >80
- PF >0.5
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
2120088 3IN1	VT-14-N	14W	1400	10 pcs	ø315x75mm
20092 3IN1	VT-14-CH	14W	1400	10 pcs	ø315x75mm
20093 3IN1	VT-24	20W	1850	10 pcs	ø380x78mm
20097 3IN1	VT-24-CH	20W	1850	10 pcs	ø380x78mm



CCT BULKHEAD WITH SENSOR

- Detection Angle:Ceiling/Wall Mounted-360°/120°
- Detection Distance:3-6M, 6-10M Optional
- Detection Range:Max D10M*6M
- Hold Time:5s,90s,5min,10min customized
- Daylight Sensor:Day,2lux,10lux,50lux optional
- Dimmable Function:Yes,0%,10%,20%,30% optional
- Standby period:0s,10s,10min optional
- Manual Override:Available by dial switch
- Detection Motion Speed:0.5-3m/s
- AC:200-240V,50/60Hz
- 30,000 hr lifespan
- 120° Beam Angle
- PC Body
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
20089 3IN1	VT-14SS	14W	1400	10 pcs	ø315x75mm
2120089 3IN1	VT-14SS-N	14W	1400	10 pcs	ø315x75mm
20094 3IN1	VT-24SS	20W	1850	10 pcs	ø380x78mm

Changeable Eyelid Half Cover For 14W



SKU

11225

Changeable Chrome Rim For 14W



SKU

11230

Changeable Chrome Rim For 20W



SKU

11231



2D BULKHEAD

- SMD LED Chip
- AC:200-240V,50/60Hz
- 30,000 hr lifespan
- 110° Beam Angle
- PC Body
- CRI >80
- PF >0.7
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
21815 4000K DAY WHITE	VT-08-N	8W	750	10 pcs	ø260x90mm
801 4000K DAY WHITE	VT-15	15W	1400	10 pcs	ø320x100mm
21801 4000K DAY WHITE	VT-15-N	15W	1625	10 pcs	ø320x100mm

2D BULKHEAD WITH
SENSOR



- AC:200-240V,50/60Hz
- 120° / 360° Detection Angle
- 3m, 5m, 8m, 10m (optional) Detection Distance
- Max D10Mx4M Detection Range
- 10S, 1min, 5min, 10min customized Hold Time
- Day, 10Lux, 30Lux, 50Lux optional Day light Sensor
- Yes, 0, 10%, 20%, 30% optional Dimmable Function
- 0.5~3m/s Detection Motion Speed
- >3 hrs Emergency Operation time
- 30,000 hr lifespan
- SMD LED Type
- PC Body
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
818 4000K DAY WHITE	VT-09	8W	720	10 pcs	ø260x90mm
803 3000K WARM WHITE 805 6400K WHITE	VT-16	15W	1400	10 pcs	ø320x100mm
21804 4000K DAY WHITE 21805 6400K WHITE	VT-16-N	15W	1580	10 pcs	ø320x100mm
819 4000K DAY WHITE	VT-22	15W	1450	10 pcs	ø280x80mm



LED DOME LIGHTS



2D BULKHEAD WITH EMERGENCY BATTERY

- AC:200-240V,50/60Hz
- >1.2 Watts Emergency Standby Watts
- 60mA Battery Charging Current
- 200mA Battery Discharging Current
- Ni-CD AA, 7.2V 1.0Ah Battery Type
- Including battery protection circuit & inhibiting mode
- Green LED Charging indicate
- >3 hrs Emergency Operation time
- 30,000 hr lifespan
- SMD LED Type
- PC Body
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
816 4000K DAY WHITE	VT-11	10W	720	10 pcs	ø260x90mm
	VT-17	17W	1400	10 pcs	ø320x100mm
21806 4000K DAY WHITE	VT-17-N	17W	1400	10 pcs	ø320x100mm



2D BULKHEAD WITH EMERGENCY BATTERY+SENSOR

- AC:200-240V,50/60Hz
- >1.2 Watts Emergency Standby Watts
- 60mA Battery Charging Current
- 200mA Battery Discharging Current
- Ni-CD AA, 7.2V 1.0Ah Battery Type
- Green LED Charging indicate
- Including battery protection circuit & inhibiting mode
- 120° / 360° Detection Angle
- Yes, 0, 10%, 20%, 30% optional Dimmable Function
- 3m, 5m, 8m, 10m (optional) Detection Distance
- 0.5~3m/s Detection Motion Speed
- >3 hrs Emergency Operation time
- 30,000 hr lifespan
- SMD LED Type
- PC Body
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
21812 4000K DAY WHITE	VT-19-N	17W	1400	10 pcs	ø320x100mm

Chrome Bezel For 15W-17W



SKU

11241



SLIM DOME LIGHT

- AC:220-240V,50/60Hz
- 110° Beam Angle
- 30,000 hr lifespan
- IP65 Rating
- PC Body
- CRI >80
- PF >0.5



SKU	Model	Watts	Lumens	Box Qty	Size
935 3000K WARM WHITE 820 4000K DAY WHITE 936 6400K DAY WHITE	VT-12S	12W	1440	10 pcs	ø270x75mm
21820 4000K DAY WHITE	VT-12S-N	12W	1480	10 pcs	ø270x75mm



SLIM DOME LIGHT WITH
EMERGENCY BACKUP

- AC:220-240V,50/60Hz
- 110° Beam Angle
- SMD LED chip type
- PC Body
- 30,000 hr lifespan
- CRI >80
- Battery type -Ni-Cd 9.6V,1.0Ah
- Battery Charging Current - 60mA
- Battery Discharge Current - 200mA
- > 3 Hours emergency operation time
- IP65 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
21822 4000K DAY WHITE	VT-12SE-N	14W	1440	10 pcs	ø270x65mm



LED DOME LIGHTS



SLIM DOME LIGHT WITH SENSOR

- 360°Ceiling/120°Wall Mounted
- Detection Motion Speed - 0.5-3m/s
- Hold Time - 30s, 40s, 50s customized
- Daylight sensor -Day, 2lux, 10lux, 50lux optional
- Dimmable - Yes, 0, 10%,20% optional
- Manual Override by dial switch
- Stand by period - 0s, 10s, 10m optional
- AC:220-240V,50/60Hz
- 110° Beam Angle
- 30,000 hr lifespan
- CRI >80
- Microwave Sensor
- 3-6m detection distance
- 10mx6m detection range

SKU	Model	Watts	Lumens	Box Qty	Size
937 3000K WARM WHITE 821 4000K DAY WHITE 938 6400K DAY WHITE	VT-12SS	12W	1440	10 pcs	ø270x75mm
21821 4000K DAY WHITE	VT-12SS-N	14W	1440	10 pcs	ø270x65mm



SLIM DOME LIGHT WITH EMERGENCY+SENSOR

- 3-6m detection distance
- 10mx6m detection range
- 360°Ceiling/120°Wall Mounted
- 0.5-3m/s detection motion speed
- 30s, 40s, 50s customized (time delay)
- Daylight sensor -Day: 7-20LUX
- Dimmable - Yes, 0, 10%,20% optional
- Manual Override
- Standby - 0s, 10s, 10m optional
- > 3 Hours emergency operation time
- Battery type -Ni-Cd 9.6V,1.0Ah
- Battery Charging Current - 60mA
- Battery Discharge Current - 200mA
- AC:220-240V,50/60Hz
- 110° Beam Angle
- 30,000 hr lifespan

SKU	Model	Watts	Lumens	Box Qty	Size
21823 4000K DAY WHITE	VT-12SES-N	14W	1440	10 pcs	ø270x65mm



DOMELIGHT - SENSOR

- Input: AC:110-240V, 50/60Hz
- 120° Beam Angle
- 20,000 hr lifespan
- SMD LED Chip
- CRI >80
- 3 year warranty
- Detection Distance - 6m Max
- Detection Range - 360°
- Time Delay - Min-10sec±3sec, Max-3min±30sec
- Detection motion Speed - 0.6-1.5m/s
- Ambient Light - <3-2000lux(adjustable)
- Instant start
- IP20 Rating



SKU	Model	Watts	Lumens	Box Qty	Size
807 3000K WARM WHITE	VT-13	12W	800	10 pcs	ø290x60mm
21807 3000K WARM WHITE 21808 4000K DAY WHITE 21809 6400K WHITE	VT-13-N	12W	800	10 pcs	ø290x60mm

CEILING LIGHTS



- AC:220-240V,50/60Hz
- IP Rating:IP44
- CRI:>80
- Warranty:3 Years
- 110° Beam Angle
- Body Type: PC



SKU	Model	Watts	Lumens	Box Qty	Size
2113889 3000K WARM WHITE 2155669 4000K DAY WHITE 2113899 6500K WHITE	VT-8033RD-N	15W Round	1850	20 pcs	ø200x47.5mm
13929 3000K WARM WHITE 13939 4000K DAY WHITE 13949 6500K WHITE	VT-8066RD	25W Round	2500	10 pcs	ø300x50mm
2113949 6500K WHITE	VT-8066RD-N	25W Round	2850	10 pcs	ø300x50mm
55679 4000K DAY WHITE 13919 6500K WHITE	VT-8033SQ	15W Square	1500	20 pcs	200x200x47.5mm
2113909 3000K WARM WHITE	VT-8033SQ-N	15W Square	1700	20 pcs	200x200x47.5mm
13959 3000K WARM WHITE 13969 4000K DAY WHITE 13979 6500K WHITE	VT-8066SQ	25W Square	2500	10 pcs	300x300x50mm



LED DOWNLIGHT



REFLECTOR DOWNLIGHT

- Adjustable Angle
- AC:85-265V,50/60Hz
- Material: aluminium
- 120° Beam Angle
- COB LED chip provided by Samsung
- CRI >80



SKU	Model	Watts	Lumens	Box Qty	Size
840 4000K DAY WHITE 841 6400K WHITE	VT-2-10	10W	900	40 pcs	300x300x50mm
21839 3000K WARM WHITE 21840 4000K DAY WHITE 21841 6400K WHITE	VT-2-10-N	10W	1060	20 pcs	ø96x34mm
842 3000K WARM WHITE 843 4000K DAY WHITE 844 6400K WHITE	VT-2-20	20W	1600	20 pcs	ø170x30mm
21842 3000K WARM WHITE 21843 4000K DAY WHITE 21844 6400K WHITE	VT-2-20-N	20W	1975	20 pcs	ø170x38mm
845 3000K WARM WHITE 832 6400K WHITE	VT-2-30	30W	2400	10 pcs	ø225x42mm
21845 3000K WARM WHITE 21846 4000K DAY WHITE 21832 6400K WHITE	VT-2-30-N	30W	2920	20 pcs	ø225x38mm



REFLECTOR DOWNLIGHT -
BLACK HOUSING

- AC:85-265V,50/60Hz
- CRI >80
- 30,000 hr lifespan
- 120° Beam Angle
- Material: aluminium
- 120° Beam Angle
- 85% Energy Saving



SKU	Model	Watts	Lumens	Box Qty	Size
20052 4000K DAY WHITE 20053 6400K WHITE	VT-2-13	10W	800	40 pcs	ø95x45mm
2120051 3000K WARM WHITE 2120052 4000K DAY WHITE	VT-2-13-N	10W	1200	40 pcs	ø95x45mm
20054 3000K WARM WHITE 20056 6400K WHITE	VT-2-23	20W	1600	20 pcs	ø160x70mm
2120054 3000K WARM WHITE 2120055 4000K DAY WHITE 2120056 6400K WHITE	VT-2-23-N	20W	2000	20 pcs	ø160x70mm
20057 3000K WARM WHITE 20059 6400K WHITE	VT-2-33	30W	2400	10 pcs	ø220x70mm
2120058 4000K DAY WHITE	VT-2-33-N	30W	3250	10 pcs	ø220x70mm



05
YEAR
WARRANTY

UGR<19

FLICKER
FREE

CRI
90

Introducing V-TAC’s LED reflector downlights — available in 12° & 38° beam angles & CRI rating of >90, to achieve any residential, retail lighting need.

LED REFLECTOR DOWNLIGHTS

- 30,000 hr lifespan
- Input Voltage - AC:220-240V,50Hz
- Material: aluminium
- Includes quick connector for easy installation

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Diagram	Size
972 2700K WARM WHITE 971 4000K DAY WHITE 970 5700K WHITE	VT-2-04	4W	320	12°	100 pcs		
987 2700K WARM WHITE 986 4000K DAY WHITE 985 5700K WHITE	VT-2-04-1	4W	320	38°	100 pcs		



LED DOWNLIGHT



SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Diagram	Size
975 2700K WARM WHITE 974 4000K DAY WHITE 973 5700K WHITE	VT-2-12	12W	960	12°	50 pcs		
990 2700K WARM WHITE 989 4000K DAY WHITE 988 5700K WHITE	VT-2-12-1	12W	960	38°	50 pcs		

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Diagram	Size
978 2700K WARM WHITE 977 4000K DAY WHITE 976 5700K WHITE	VT-2-16	16W	1280	12°	50 pcs		
993 2700K WARM WHITE 992 4000K DAY WHITE 991 5700K WHITE	VT-2-16-1	16W	1280	38°	50 pcs		

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Diagram	Size
981 2700K WARM WHITE 980 4000K DAY WHITE 979 5700K WHITE	VT-2-21	20W	1600	12°	20 pcs		
996 2700K WARM WHITE 995 4000K DAY WHITE 994 5700K WHITE	VT-2-21-1	20W	1600	38°	20 pcs		

SKU	Model	Watts	Lumens	Beam Angle	Box Qty	Diagram	Size
984 2700K WARM WHITE 983 4000K DAY WHITE 982 5700K WHITE	VT-2-36	36W	2880	12°	20 pcs		
999 2700K WARM WHITE 998 4000K DAY WHITE 997 5700K WHITE	VT-2-36-1	36W	2880	38°	20 pcs		



NEW



LED SPOT DOWNLIGHT

- Recessed Downlight
- AC:220-240V,50Hz
- 60° Beam Angle
- IP20
- 20,000 hr lifespan
- PC Body
- CRI>80
- 20,000 hr lifespan
- 65mm Cutout size


02
YEAR
WARRANTY

SKU	Model	Watts	Lumens	Diagram	Size
23182 3000K WARM WHITE 23183 4000K DAY WHITE 23184 6400K WHITE	VT-7007	7W	660		86x20mm



LED CABINET LIGHT

Enjoy the convenience of V-TAC's new LED cabinet lights with built-in PIR sensor. Ideal for wardrobes, bookshelves, drawers, and tool cabinets. Fully powered by batteries (3xAAA Battery not included), designed for a neat installation.



02
YEAR
WARRANTY


PIR
MOTION
SENSOR

SKU	Model	Watts	Lumens	Box Qty
813 4000K DAY WHITE	VT-80	1.5W	80	50 pcs



LED CABINET LIGHT

Enjoy the convenience of V-TAC's new LED cabinet lights with built-in PIR sensor. Ideal for wardrobes, bookshelves, drawers, and tool cabinets. Fully powered by batteries (4xAA Battery not included), designed for a neat installation.



05
YEAR
WARRANTY

PIR
MOTION
SENSOR

SKU	Model	Watts	Lumens	Box Qty
814 4000K DAY WHITE	VT-81	1.5W	135	50 pcs



LED NIGHT LIGHT



LED NIGHT LIGHT

Eye-friendly LED night light, produce comforting gentle warm light to let you see better in the dark. This white LED nightlight can illuminate any dark space in your home or office.

- Voltage/Frequency: 220-240V, 50Hz
- Power: 0.45W
- RA: >80
- Body material: ABS+PC
- Box Qty: 50pcs



SKU	Model	Watts	Box Qty
829 4000K DAY WHITE	VT-83RD	0.45W	100



SKU	Model	Watts	Box Qty
830 3000K WARM WHITE 831 4000K DAY WHITE	VT-83SQ	0.45W	100



SKU	Model	Watts	Box Qty
505 3000K WARM WHITE 506 4000K DAY WHITE	VT-84RD	0.45W	100



SKU	Model	Watts	Box Qty
507 3000K WARM WHITE 508 4000K DAY WHITE	VT-84SQ	0.45W	100



SKU	Model	Watts	Box Qty
20017 4000K DAY WHITE	VT-86RD	0.45W	100



SKU	Model	Watts	Box Qty
20019 3000K WARM WHITE 20020 4000K DAY WHITE	VT-86SQ	0.45W	100



V-TAC
Meaningful Innovation.

SAMSUNG
LED
Illuminated

Emergency Exit Lights

V-TAC new range of LED emergency lights comes at an age of increased awareness and standards for safety compliance in different infrastructures. Now equipped with highly efficient LEDs provided by Samsung, these emergency lights include clear-cut exit signs, and are powered by high performance batteries, to provide a longer lifespan, lower maintenance, with increased working time when activated. V-TAC's emergency lights are a smart choice for effective emergency lighting to meet fire & safety assessments in residential and commercial buildings, offices, hotels, hospitals, and schools

Key Features

- High quality thermoplastic
- High quality Ni-Cd batteries made for longevity & low maintenance
- Reliable emergency backup of 3 hrs
- Rectangular type plastic with different signs for various locations
- Single or double face configuration
- Wall, side, or ceiling mounted
- LED indicator light and push button test switch LEDs mounted on circuit board
- 12-24 hr recharge after more than 3 hr discharge
- Efficient thermal management technology
- Corrosion-free mounting clamps
- Maintained operation mode

